

Cryogenic Safety Valve

Parameters

PN: 4.0MPa

DN: Ø25

Design Temp.: -196℃ ~+80℃

Media: LNG, LO₂, LN₂, LAr, CO₂


Flow Coefficient: 0.29



This kind of product has certified by CE, EAC, TS and CCS
Standards: GB/T 29026, EN13648:2008, TR CU 032/2013

Materials

1	Body	CF8	5	Spring	S30210
2	Gasket	PTFE+MoS2	6	Adjusting Nut	HPb59-1
3	Disc	HPb59-1	7	Gasket	HPb59-1
4	Spring Seat	HPb59-1	8	Cover	S30408

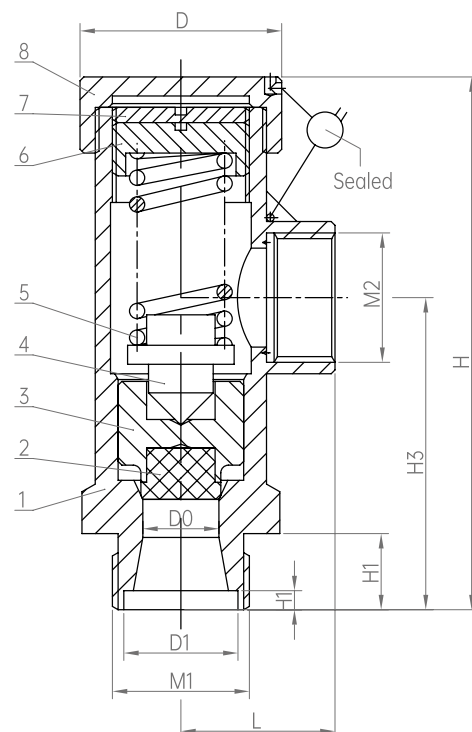

Model No.	Specifications & Dimensions (mm)										Set Pressure (MPa)	Weight(kg)
	H	H1	H2	H3	M1	M2	L	D	D0	D1		
DA-25	141	5	20	82	M36x2	M33x2	40.5	Ø53	Ø25	Ø30	0.95 ~ 2.1	1.3
DA-25A											0.4 ~ 0.94	1.3
DA-25A2											2.11 ~ 2.59	1.3
DA-25A3											2.60 ~ 3.76	1.3
DA-25A4											0.2 ~ 0.33	1.3