



DA22F-40P

Cryogenic Safety Valve

Parameters

PN: 4.0MPa


Design Temp.: -196℃ ~+80℃

Media: LNG, LO₂, LN₂, LAr, CO₂

Flow Coefficient: 0.66



This kind of product has certified by CE, EAC, TS and CCS
Standards: GB/T 29026, EN13648:2008, TR CU 032/2013

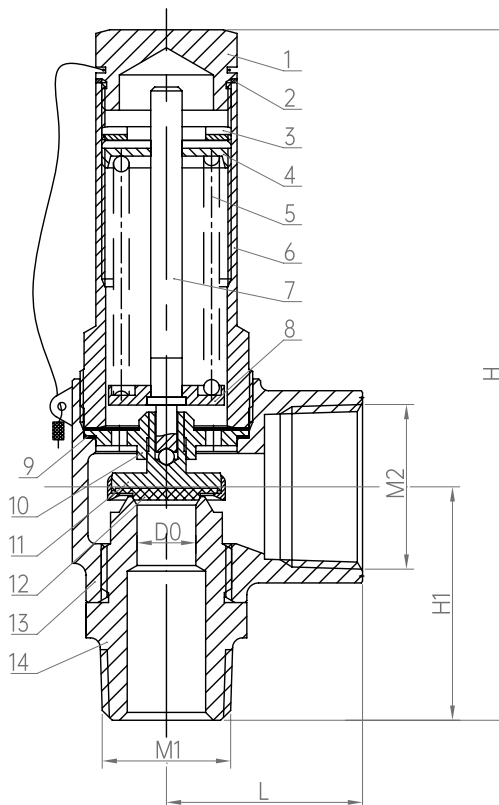

Materials

1	Dust Cover	HPb59-1	6	Bonnet	CF8	11	Disc	HPb59-1
2	Upper Gasket	T2	7	Stem	HPb59-1	12	Gasket	PTFE+C
3	Lock Nut	HPb59-1	8	Spring Bottom Pad	HPb59-1	13	Body	CF8
4	Adjusting Nut	HPb59-1	9	Sealing	T2	14	Valve Seat	HPb59-1
5	Spring	S30210	10	Gland Ring	HPb59-1			

Model No.	Specifications & Dimensions (mm)							Set Pressure (MPa)	Weight(kg)
	H	H1	H2	H3	M1	M2	DN		
DA22F-40P(15B)	154.5	49.5	Ø10.5	42.5	NPT 1/2	NPT 1	Ø15	0.4 ~ 1.59	0.8
DA22F-40P(15B1)								1.60 ~ 2.7	0.8
DA22F-40P(15B2)								2.71 ~ 3.5	0.8
DA22F-40P(20B)	157	52	Ø10.5	42.5	NPT 3/4	NPT 1	Ø20	0.4 ~ 1.59	0.9
DA22F-40P(20B1)								1.60 ~ 2.7	0.9
DA22F-40P(20B2)								2.71 ~ 3.5	0.9
DA22F-40P(25B)	181	64.5	Ø15	50	NPT 1	NPT 1 1/4	Ø25	0.4 ~ 1.59	1.3
DA22F-40P(25B1)								1.60 ~ 2.7	1.3
DA22F-40P(25B2)								2.71 ~ 3.5	1.3