



Cryogenic Check Valve Vacuum Jacketed

Parameters

PN: 4.0MPa

DN: Ø25


Design Temp.: -196°C ~+80°C

Media: LNG, LO₂, LN₂, LAr, CO₂

Connection : Socket Weld



This kind of product has certified by EAC and TS
Standards: GB/T 24925, TR CU 032/2013

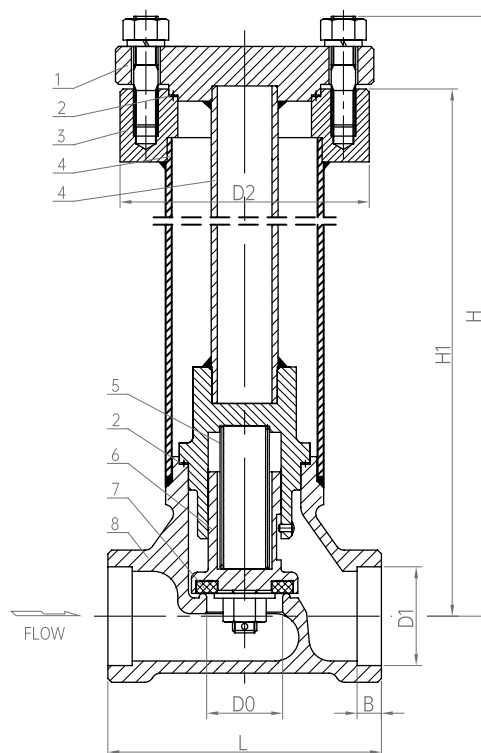

Materials

1	Bonnet	S30408	5	Spring	S30210
2	Washer	RPTFE	6	Disc	S30408
3	Flange	S30408	7	Disc Sealing	PCTFE
4	Connecting Pipe	S30408	8	Body	CF8

Model No.	Specifications & Dimensions (mm)							Weight(kg)
	H	H1	L	D0	D1	D2	B	
DZH-25S	270	250	90	Ø25	Ø32.5	Ø82	8	