

Cryogenic Globe Valve Vacuum Jacketed


Parameters

PN: 4.0MPa
DN: Ø15~Ø50
Design Temp.: -196℃ ~+80℃
Media: LNG, LO₂, LN₂, LAr, CO₂

Connection : Butt Weld



This kind of product has certified by EAC and TS
Standards: GB/T 24925, TR CU 032/2013

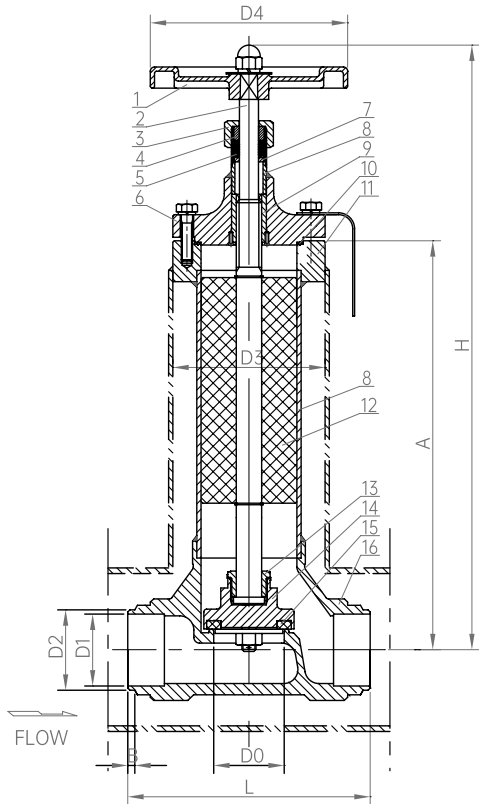

Materials

1 Hand Wheel	Y102	7 Washer	HPb59-1	13 Connecting Nut	S30408
2 Stem	S30408	8 Connecting Pipe	S30408	14 Disc	S30408
3 Gland Nut	S30408	9 Bushing	HPb59-1	15 Disc Sealing	PCTFE
4 Gland	HPb59-1	10 Washer	RPTFE	16 Body	CF8
5 Washer	PTFE	11 Flange	S30408		
6 Bonnet	CF8	12 Pilot Sleeve	PTFE		

Model No.	Specifications & Dimensions (mm)										Weight(kg)
	H Opening	H Closing	A	B	L	D0	D1	D2	D3	D4	
DZJ-15K	359	345	250	6	65	Ø15	Ø14	Ø18	Ø63	Ø80	2.2
DZJ-25K	364	349	240	8	90	Ø25	Ø27	Ø32	Ø82	Ø100	
DZJ-32K	370	357	250	8	105	Ø32	Ø32	Ø38	Ø101	Ø100	
DZJ-40K	434	416	286.5	8	120	Ø40	Ø39	Ø45	Ø101	Ø125	
DZJ-50K	436	421	290	10	140	Ø50	Ø51	Ø57	Ø126	Ø140	