


DH14F-40P

Cryogenic Check Valve Swing Type

Parameters

PN: 4.0MPa
DN: Ø10~Ø50
Design Temp.: -196℃ ~+80℃
Media: LNG. LO₂. LN₂. LAr

Connection : Thread Connection

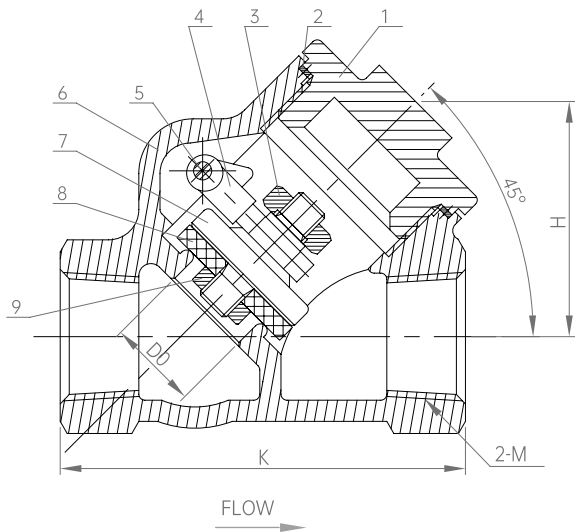

This kind of product has certified by CE, EAC, TS and CCS
Standards: GB/T 24925, EN1626:2008, TR CU 032/2013

Materials

1	Bonnet	CF8	6	Body	CF8
2	Gasket	T2	7	Disc	HPb59-1
3	Nut	HPb59-1	8	Gasket	PTFE
4	Rolling Bar	HPb59-1	9	Nut	HPb59-1
5	Round Pin	S30408			

Model No.	Specifications & Dimensions (mm)				Weight(kg)
	H	L	D0	D1	
DHX-10	54	Ø15	34.5	NPT 3/8	
DHX-15	67	Ø15	39	NPT 1/2	0.8
DHX-25	95	Ø25	54	NPT 1	0.9
DHX-40	137	Ø40	79	NPT 1 1/2	1.8