



DH61F-40P

Cryogenic Check Valve Uplift Type

Parameters


PN: 4.0MPa

DN: Ø65~Ø100

Design Temp.: -196°C ~+80°C

Media: LNG, LO₂, LN₂, LAr.

Connection : Socket Weld

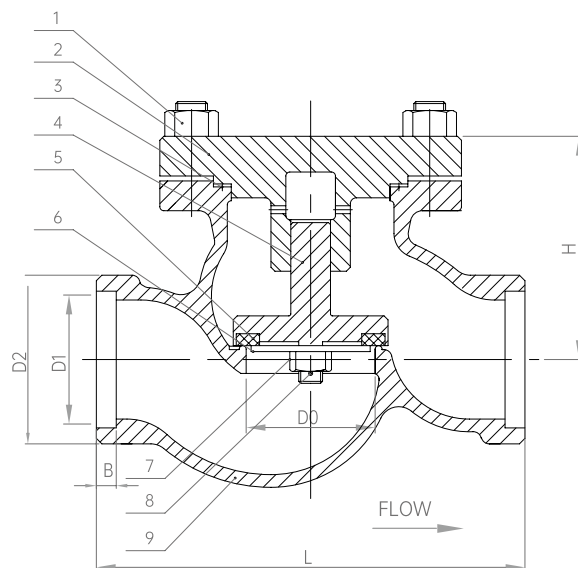

This kind of product has certified by CE, EAC, TS and CCS
Standards: GB/T 24925, TR CU 032/2013

Materials

1	Hexagon Screw	S30408	6	Gasket	S30408
2	Bonnet	CF8	7	Hexagon Nut	S30408
3	Gasket	RPTFE	8	Split Pin	S30408
4	Disc	S30408	9	Body	CF8
5	Disc Sealing	PTFE			

Model No.	Specifications & Dimensions (mm)						Weight(kg)
	H	L	D0	D1	D2	B	
DH-65B	112	216	Ø65	Ø76.5	Ø85	15	10
DH-80B	118	241	Ø80	Ø89.5	Ø103	15	13.9
DH-100B	138	292	Ø100	Ø108.5	Ø120	15	