

DH41F-40P

Cryogenic Check Valve Uplift Type

Parameters


PN: 4.0MPa

DN: Ø65~Ø100

Design Temp.: -196°C ~+80°C

Media: LNG, LO₂, LN₂, LAr

Connection : Flanged connection

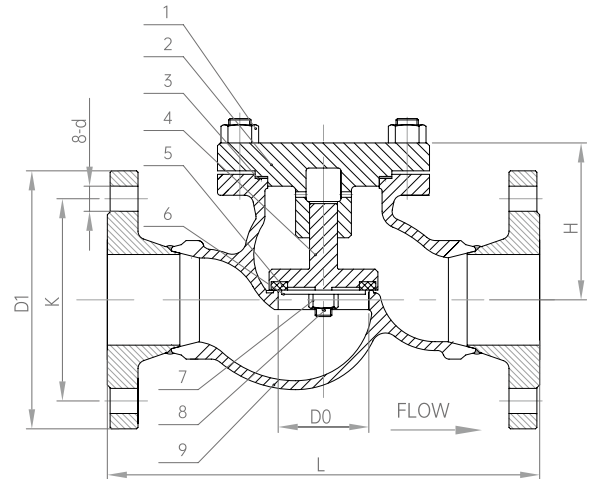

This kind of product has certified by CE, EAC, TS and CCS
Standards: GB/T 24925, EN1626:2008, TR CU 032/2013

Materials

1	Hexagon Screw	S30408	6	Gasket	S30408
2	Bonnet	CF8	7	Hexagon Nut	S30408
3	Gasket	RPTFE	8	Split Pin	S30408
4	Disc	S30408	9	Body	CF8
5	Disc Sealing	PTFE			

Model No.	Specifications & Dimensions (mm)						Weight(kg)
	H	L	D0	D1	K	d	
DH-65F	112	308	Ø65	Ø185	Ø145	Ø18	
DH-80F	118	345	Ø80	Ø200	Ø160	Ø18	
DH-100F	138	410	Ø100	Ø235	Ø190	Ø18	