



## DH11F-40T

### Cryogenic Check Valve Uplift Type

#### Parameters


PN: 4.0MPa

DN: Ø10~Ø25

Design Temp.: -196°C ~+80°C

Media: LNG, LO<sub>2</sub>, LN<sub>2</sub>, LAr, CO<sub>2</sub>

Connection : Socket Weld

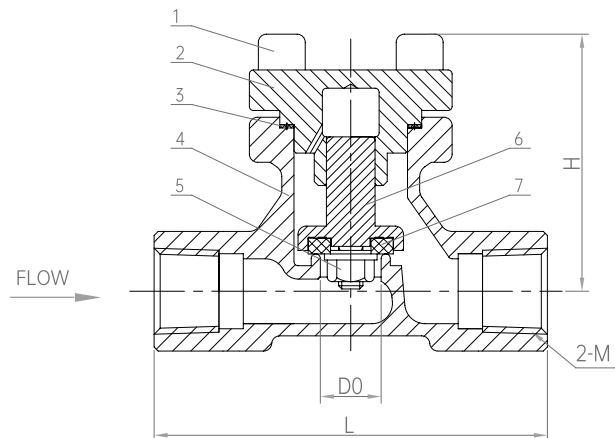


This kind of product has certified by CE, EAC, TS and CCS

Standards: GB/T 24925, EN1626:2008, TR CU 032/2013

#### Materials

|   |        |        |   |        |        |
|---|--------|--------|---|--------|--------|
| 1 | Screw  | S30408 | 5 | Nut    | C36000 |
| 2 | Bonnet | B62    | 6 | Disc   | C37700 |
| 3 | Gasket | D#9000 | 7 | Gasket | PTFE   |
| 4 | Body   | B62    |   |        |        |

Remarks: **DH-15NPT.99**



| Model No.   | Specifications & Dimensions (mm) |    |    |         |     | Weight(kg) |
|-------------|----------------------------------|----|----|---------|-----|------------|
|             | H                                | L  | D0 | M       | Cv  |            |
| DH-10NPT.99 | 55                               | 60 | 13 | NPT 3/8 | 2.0 |            |
| DH-15NPT.99 | 62                               | 65 | 15 | NPT 1/2 | 2.7 |            |
| DH-20NPT.99 | 70                               | 80 | 20 | NPT 3/4 | 5.5 |            |
| DH-25NPT.99 | 77                               | 90 | 25 | NPT 1   | 8.7 |            |