



DJ661F-40P

Emergency Shut-off Valve


Parameters

PN: 4.0MPa
DN: Ø10 ~ Ø50
Design Temp.: -196℃ ~+75℃
Media: LNG, LO₂, LN₂, LAr, CO₂
Driving Pressure: 0.4 ~ 0.7MPa

Connection: Socket Weld



This kind of product has certified by CE, EAC, TS and CCS
Standards: GB/T 24918, EN1626:2008, TR CU 032/2013

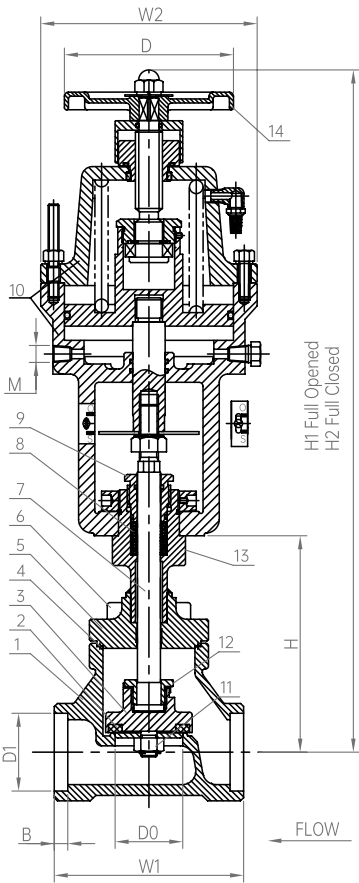

Materials

1	Body	CF8	6	Screw	S30408	11	Hexagon Nut	S30408
2	Disc Sealing	PCTFE	7	Stem	S30408	12	Connecting Nut	S30408
3	Disc	S30408	8	V ring	PTFE	13	Gland Packings	S30408
4	Gasket	RPTFE	9	Gland Nut	S30408	14	Hand Wheel	Y102
5	Bonnet	S30408	10	Cylinder Body & Cover	ZL104			

Model No.	Specifications & Dimensions (mm)										Maximum Working Pressure (MPa)	Weight(kg)
	H	H1	D	D0	D1	D2	B	W1	W2	M		
DJQ-32D2	170	470	460	Ø32	Ø38.5	Ø100	8	105	Ø130	Rc1/4	2.5	
DJQ-40D2	150	504	490	Ø40	Ø45.5	Ø120	8	120	Ø160	Rc1/4	2.5	
DJQ-50D2	160	514	500	Ø50	Ø57.5	Ø125	10	140	Ø160	Rc1/4	2.5	
DJQ-32DY2	170	470	460	Ø32	Ø43.2	Ø100	8	105	Ø130	Rc1/4	2.5	
DJQ-40DY2	150	504	490	Ø40	Ø49	Ø120	8	120	Ø160	Rc1/4	2.5	
DJQ-50DY2	160	514	500	Ø50	Ø61.1	Ø125	10	140	Ø160	Rc1/4	2.5	