

DJ661F-40P

Emergency Shut-off Valve

Parameters

PN: 4.0MPa

DN: Ø65 ~ Ø100

Design Temp.: -196℃ ~ +75℃


Media: LNG, LO₂, LN₂, LAr, CO₂

Driving Pressure: 0.4 ~ 0.7MPa

Connection: Socket Weld



This kind of product has certified by CE, EAC, TS and CCS
Standards: GB/T 24918, EN1626:2008, TR CU 032/2013

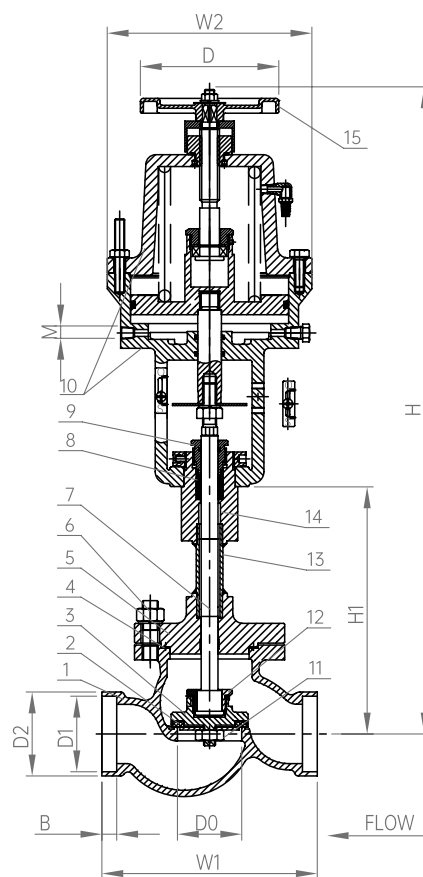

Materials

1	Body	CF8	6	Screw	S30408	11	Hexagon Nut	S30408
2	Disc Sealing	PCTFE	7	Stem	S30408	12	Connecting Nut	S30408
3	Disc	S30408	8	V ring	PTFE	13	Connecting Pipe	S30408
4	Gasket	RPTFE	9	Gland Nut	S30408	14	Gland Packings	S30408
5	Bonnet	S30408	10	Cylinder Body & Cover	ZL104	15	Hand Wheel	Y102

Model No.	Specifications & Dimensions (mm)										Maximum Working Pressure (MPa)	Weight(kg)
	H	H1	D	D0	D1	D2	B	W1	W2	M		
DJQ-65C2	673	250	Ø65	Ø76.5	Ø85	Ø140	7	216	207	Rc1/4	2.5	25
DJQ-80C2	798	319	Ø80	Ø89.5	Ø103	Ø200	8	241	250	Rc1/4	2.0	39.5
DJQ-100C2	798	319	Ø100	Ø109	Ø120	Ø200	9	292	250	Rc1/4	1.6	47.1