

DJ641F-40P

Emergency Shut-off Valve

Parameters

PN: 4.0MPa

DN: Ø10 ~ Ø50

Design Temp.: -196°C ~ +75°C


Media: LNG, LO₂, LN₂, LAr, CO₂

Driving Pressure: 0.4 ~ 0.7MPa

Connection: Flanged Connection with PN 40 and Class 150



This kind of product has certified by CE, EAC, TS and CCS
Standards: GB/T 24918, EN1626:2008, TR CU 032/2013

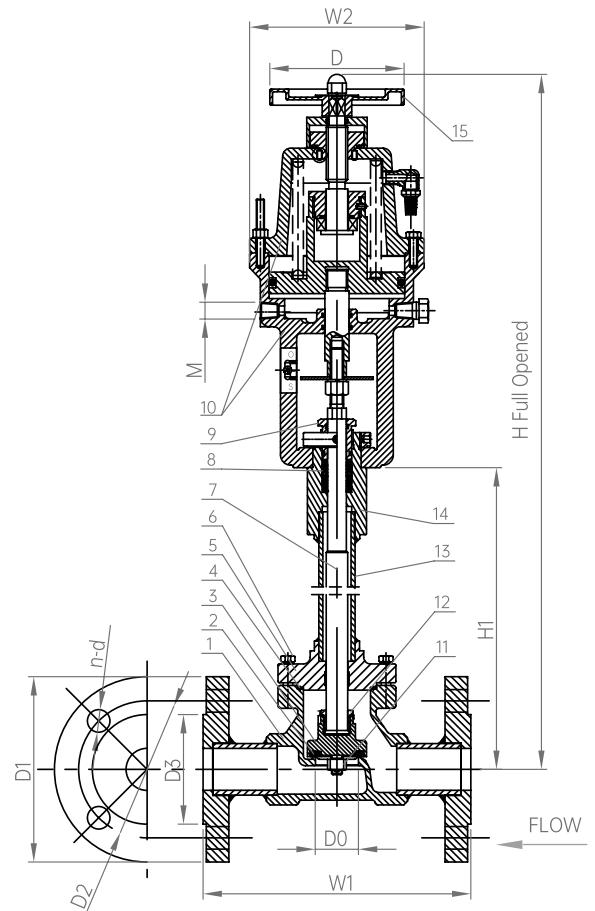

Materials

1	Body	CF8	6	Screw	S30408	11	Hexagon Nut	S30408
2	Disc Sealing	PCTFE	7	Stem	S30408	12	Connecting Nut	S30408
3	Disc	S30408	8	V ring	PTFE	13	Connecting Pipe	S30408
4	Gasket	RPTFE	9	Gland Nut	S30408	14	Gland Packings	S30408
5	Bonnet	S30408	10	Cylinder Body & Cover	ZL104	15	Hand Wheel	Y102

Model No.	Specifications & Dimensions (mm)											Maximum Working Pressure (MPa)	Weight(kg)
	H	H1	D	D0	D1	D2	D3	n-d	W1	W2	M		
DJQ-15F	475	175	Ø100	Ø15	Ø95	Ø65	Ø45	4-Ø14	129	Ø130	Rc1/4	1.6	
DJQ-20F	479	179	Ø100	Ø20	Ø105	Ø75	Ø58	4-Ø14	154	Ø130	Rc1/4	1.6	8.5
DJQ-25F	486	186	Ø100	Ø25	Ø115	Ø85	Ø68	4-Ø14	166	Ø130	Rc1/4	1.6	
DJQ-32F	500	200	Ø100	Ø32	Ø140	Ø100	Ø78	4-Ø18	185	Ø130	Rc1/4	1.6	
DJQ-40F	577	223	Ø125	Ø40	Ø150	Ø110	Ø88	4-Ø18	214	Ø160	Rc1/4	1.6	
DJQ-50F	587	233	Ø125	Ø50	Ø165	Ø125	Ø102	4-Ø18	240	Ø160	Rc1/4	1.6	
DJQ-15FY	475	175	Ø100	Ø15	Ø90	Ø60.3	Ø34.9	4-Ø16	65	Ø130	Rc1/4	1.6	
DJQ-20FY	479	179	Ø100	Ø20	Ø100	Ø69.9	Ø42.9	4-Ø16	80	Ø130	Rc1/4	1.6	8.5
DJQ-25FY	486	186	Ø100	Ø25	Ø110	Ø79.4	Ø50.8	4-Ø16	90	Ø130	Rc1/4	1.6	
DJQ-32FY	500	200	Ø100	Ø32	Ø115	Ø88.9	Ø63.5	4-Ø16	105	Ø130	Rc1/4	1.6	
DJQ-40FY	577	223	Ø125	Ø40	Ø125	Ø98.4	Ø73	4-Ø16	120	Ø160	Rc1/4	1.6	
DJQ-50FY	587	233	Ø125	Ø50	Ø150	Ø127.7	Ø92.1	4-Ø18	140	Ø160	Rc1/4	1.6	