



DJ641F-25P

Emergency Shut-off Valve

Parameters

PN: 2.5MPa

DN: Ø65 ~ Ø100

Design Temp.: -196℃ ~ +75℃

Media: LNG, LO₂, LN₂, LAr, CO₂


Driving Pressure: 0.4 ~ 0.7MPa

Connection: Flanged connection with PN 25



This kind of product has certified by CE, EAC, TS and CCS

Standards: GB/T 24918, EN1626:2008, TR CU 032/2013

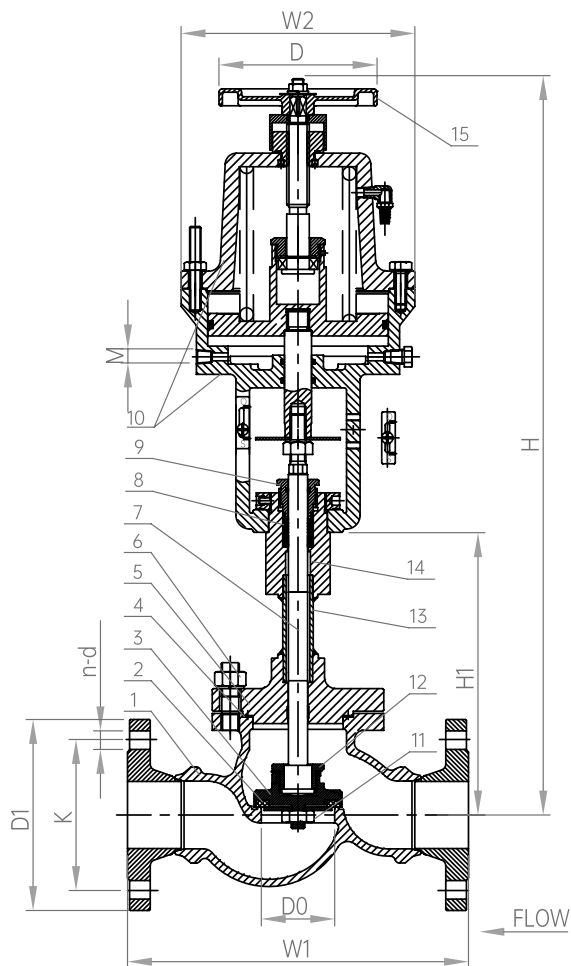

Materials

1	Body	CF8	6	Screw	S30408	11	Hexagon Nut	S30408
2	Disc Sealing	PCTFE	7	Stem	S30408	12	Connecting Nut	S30408
3	Disc	S30408	8	V ring	PTFE	13	Connecting Pipe	S30408
4	Gasket	RPTFE	9	Gland Nut	S30408	14	Gland Packings	S30408
5	Bonnet	S30408	10	Cylinder Body & Cover	ZL104	15	Hand Wheel	Y102

Model No.	Specifications & Dimensions (mm)										Maximum Working Pressure (MPa)	Weight(kg)
	H	H1	D	D0	D1	K	n-d	W1	W2	M		
DJQ-65F1	673	250	Ø140	Ø65	Ø185	Ø145	8-Ø18	308	207	Rc1/4	2.5	
DJQ-80F1	798	319	Ø200	Ø80	Ø200	Ø160	8-Ø18	345	250	Rc1/4	2.0	
DJQ-100F1	798	319	Ø200	Ø100	Ø235	Ø190	8-Ø22	410	250	Rc1/4	1.6	