

# DJ661F-40P

## Emergency Shut-off Valve

### Parameters

PN: 4.0MPa

DN: Ø25 ~ Ø50

Design Temp.: -196°C ~ +75°C


Media: LNG, LO<sub>2</sub>, LN<sub>2</sub>, LAr, CO<sub>2</sub>

Driving Pressure: 0.4 ~ 0.7MPa

Connection: Socket Weld



This kind of product has certified by CE, EAC, TS and CCS  
Standards: GB/T 24918, EN1626:2008, TR CU 032/2013

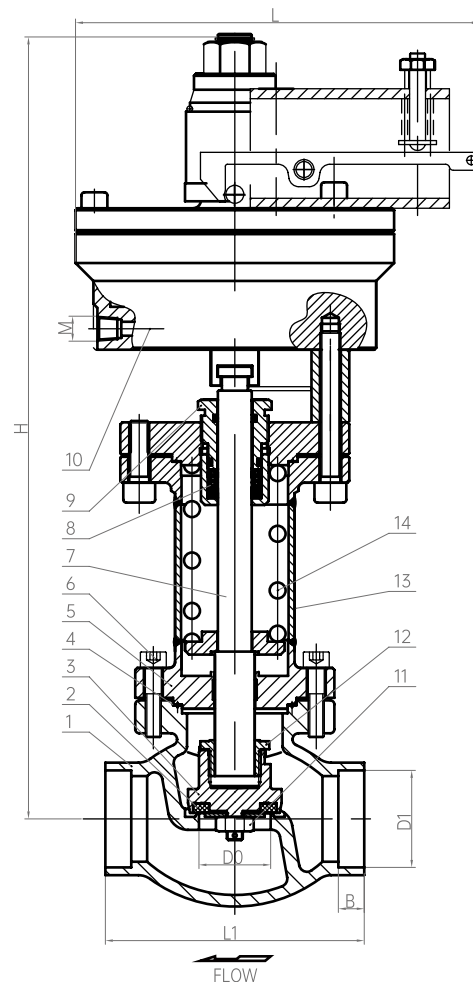

### Materials

|   |              |         |    |               |          |    |                 |        |
|---|--------------|---------|----|---------------|----------|----|-----------------|--------|
| 1 | Body         | CF3M    | 6  | Screw         | S31603   | 11 | Hexagon Nut     | S30408 |
| 2 | Disc Sealing | PCTFE   | 7  | Stem          | S31603   | 12 | Connecting Nut  | S30408 |
| 3 | Disc         | HPb59-1 | 8  | V ring        | PTFE     | 13 | Connecting Pipe | S31603 |
| 4 | Gasket       | RPTFE   | 9  | Gland Nut     | S31603   | 14 | Spring          | S30210 |
| 5 | Bonnet       | S31603  | 10 | Cylinder Body | 6061(T6) |    |                 |        |

| Model No. | Specifications & Dimensions (mm) |     |     |     |       |    |       | Weight(kg) |
|-----------|----------------------------------|-----|-----|-----|-------|----|-------|------------|
|           | H                                | L   | L1  | D0  | D1    | B  | M     |            |
| DJQ-25E   | 395                              | 203 | 155 | Ø45 | Ø57.5 | 16 | Rc1/4 |            |
| DJQ-40E   | 393                              | 203 | 130 | Ø36 | Ø45.5 | 13 | Rc1/4 |            |
| DJQ-50E   | 425                              | 203 | 115 | Ø25 | Ø32.5 | 13 | Rc1/4 |            |