



DJ661F-16P

Emergency Shut-off Valve
Normally Opened


Parameters

PN: 1.6MPa
DN: Ø15 ~ Ø25
Design Temp.: -196℃ ~+75℃
Media: LNG, LO₂, LN₂, LAr, CO₂
Driving Pressure: 0.4 ~ 0.7MPa

Connection: Socket Weld



This kind of product has certified by CE,EAC,TS and CCS
Standards: GB/T 24918, EN1626:2008, TR CU 032/2013

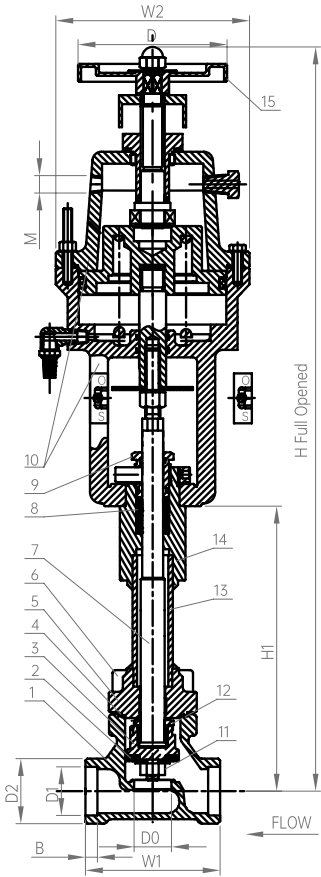

Materials

1	Body	CF8	6	Screw	S30408	11	Hexagon Nut	S30408
2	Disc Sealing	PCTFE	7	Stem	S30408	12	Connecting Nut	S30408
3	Disc	S30408	8	V ring	PTFE	13	Connecting Pipe	S30408
4	Gasket	RPTFE	9	Gland Nut	S30408	14	Gland Packings	S30408
5	Bonnet	S30408	10	Cylinder Body & Cover	ZL104	15	Hand Wheel	Y102

Model No.	Specifications & Dimensions (mm)										Maximum Working Pressure (MPa)	Weight(kg)
	H	H1	D	D0	D1	D2	B	W1	W2	M		
DJQC-15	488	175	Ø100	Ø15	Ø18.5	Ø29.5	6	65	Ø130	Rc1/4	1.6	
DJQC-20	492	179	Ø100	Ø20	Ø25.5	Ø36	8	80	Ø130	Rc1/4	1.6	
DJQC-25	499	186	Ø100	Ø25	Ø32.5	Ø43.5	8	90	Ø130	Rc1/4	1.6	