

# DJ661F-16P

Emergency Shut-off Valve  
Normally Opened

## Parameters

PN: 1.6MPa

DN: Ø15 ~ Ø25

Design Temp.: -196°C ~+75°C


Media: LNG, LO<sub>2</sub>, LN<sub>2</sub>, LAr, CO<sub>2</sub>

Driving Pressure: 0.4 ~ 0.7MPa

Connection: Butt Weld



This kind of product has certified by CE,EAC,TS and CCS  
Standards: GB/T 24918, EN1626:2008, TR CU 032/2013

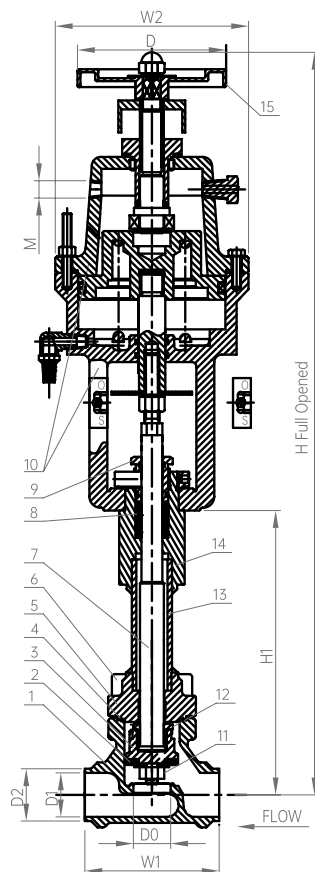

## Materials

|   |              |        |    |                       |        |    |                 |        |
|---|--------------|--------|----|-----------------------|--------|----|-----------------|--------|
| 1 | Body         | CF8    | 6  | Screw                 | S30408 | 11 | Hexagon Nut     | S30408 |
| 2 | Disc Sealing | PCTFE  | 7  | Stem                  | S30408 | 12 | Connecting Nut  | S30408 |
| 3 | Disc         | S30408 | 8  | V ring                | PTFE   | 13 | Connecting Pipe | S30408 |
| 4 | Gasket       | RPTFE  | 9  | Gland Nut             | S30408 | 14 | Gland Packings  | S30408 |
| 5 | Bonnet       | S30408 | 10 | Cylinder Body & Cover | ZL104  | 15 | Hand Wheel      | Y102   |

| Model No. | Specifications & Dimensions (mm) |     |      |     |        |       |    |      |       | Maximum Working Pressure (MPa) | Weight(kg) |
|-----------|----------------------------------|-----|------|-----|--------|-------|----|------|-------|--------------------------------|------------|
|           | H                                | H1  | D    | D0  | D1     | D2    | W1 | W2   | M     |                                |            |
| DJQC-15A  | 488                              | 175 | Ø100 | Ø15 | Ø17.08 | Ø21.4 | 65 | Ø130 | Rc1/4 | 1.6                            |            |
| DJQC-20A  | 492                              | 179 | Ø100 | Ø20 | Ø22.48 | Ø26.7 | 80 | Ø130 | Rc1/4 | 1.6                            |            |
| DJQC-25A  | 499                              | 186 | Ø100 | Ø25 | Ø27.9  | Ø33.4 | 90 | Ø130 | Rc1/4 | 1.6                            |            |