

Cryogenic Economizer

Parameters

PN: 4.0MPa

DN: Ø10


Design Temp.: -196°C ~+80°C

Media: LNG. LO₂. LN₂. LAr. CO₂



This kind of product has certified by CE, EAC, TS and CCS

Standards: GB/T 24925, EN1626:2008, TR CU 032/2013

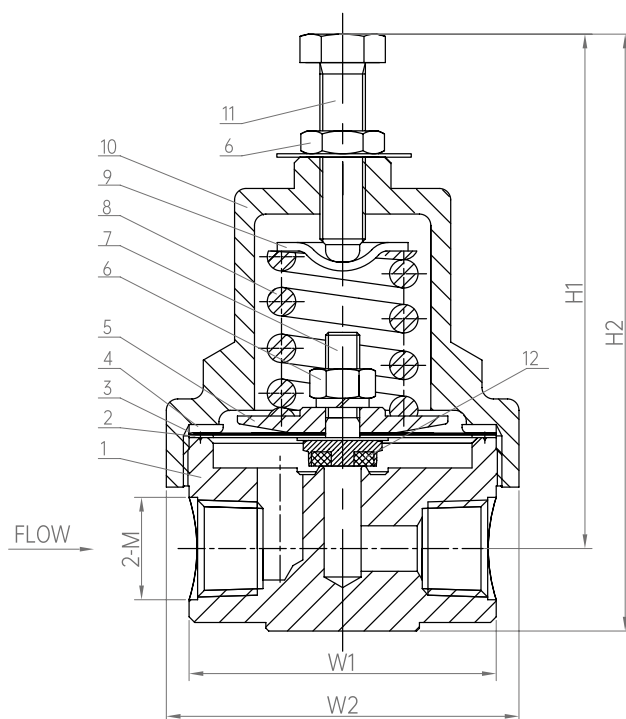

Materials

1	Body	C37700	5	Spring Bottom Pad	S36000	9	Spring Upper Pad	S30408
2	Washer	D#9000	6	Nut	S30408	10	Bonnet	C37700
3	Diaphragm	QSn6.5-0.1	7	Disc	C36000	11	Adjusting Screw	S30408
4	Gland Ring	C36000	8	Spring	S30210	12	Gasket	PFA

Remarks: The material of TJ10A1 is PCTFE.

Model No.	Specifications & Dimensions (mm)					Pressure Adjusting Range(Mpa)	Weight(kg)
	H1	H2	W1	W2	M		
TJ-10	88	105	54	Ø62	NPT3/8	P2=0.2~1.6	0.8
TJ-10A	88	105	54	Ø62	NPT3/8	P2=1.0~2.76	0.8
TJ-10A1	88	105	54	Ø62	NPT3/8	P2=2.76~3.5	0.8