



Cryogenic Diverter Valve

Parameters

PN: 4.0MPa



DN: Ø25

Design Temp.: -196°C ~+80°C

Media: LNG, LO₂, LN₂, LAr, CO₂



This kind of product has certified by CE, EAC, TS and CCS
Standards: GB/T 24925, EN1626:2008, TR CU 032/2013

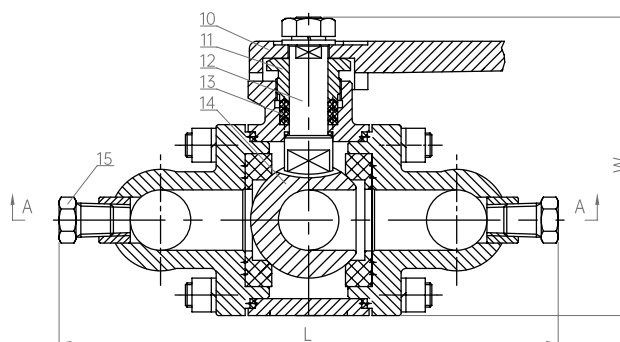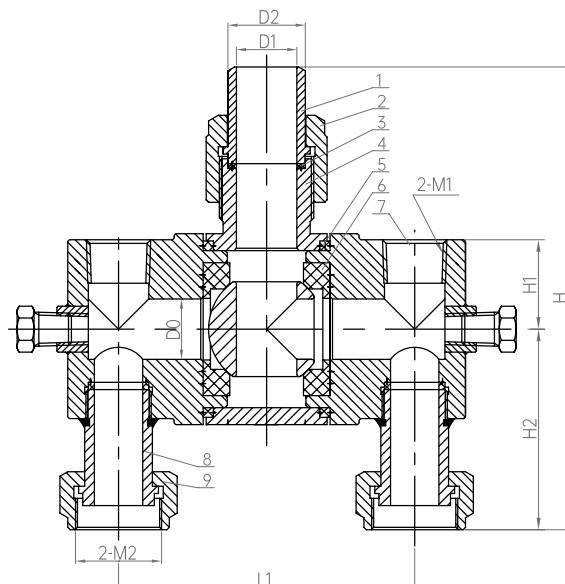

Materials

1 Pipe	S30408	6 Ball Lining	PTFE+C	11 Gland Nut	HPb59-1
2 Nut	HPb59-1	7 Bonnet	CF8	12 Stem	S30408
3 Gasket	PTFE	8 Pipe	S30408	13 Washer	PTFE
4 Body	CF8	9 Nut	HPb59-1	14 Ball	S30408
5 Washer	PTFE	10 Hand Lever	CF8	15 Screw Plug	HPb59-1

Model No.	Specifications & Dimensions (mm)											Weight(kg)
	H	H1	H2	D0	D1	D2	L	L1	W	M1	M2	
DQS-25B	191.5	37	83	Ø25	Ø25	Ø32	206	122.5	123.5	NPT3/4	M36×2	