




Cryogenic Diverter Valve

Parameters

PN: 4.0MPa
DN: Ø25
Design Temp.: -196℃ ~+80℃
Media: LNG, LO₂, LN₂, LAr, CO₂



This kind of product has certified by CE, EAC, TS and CCS
Standards: GB/T 24925, EN1626:2008, TR CU 032/2013

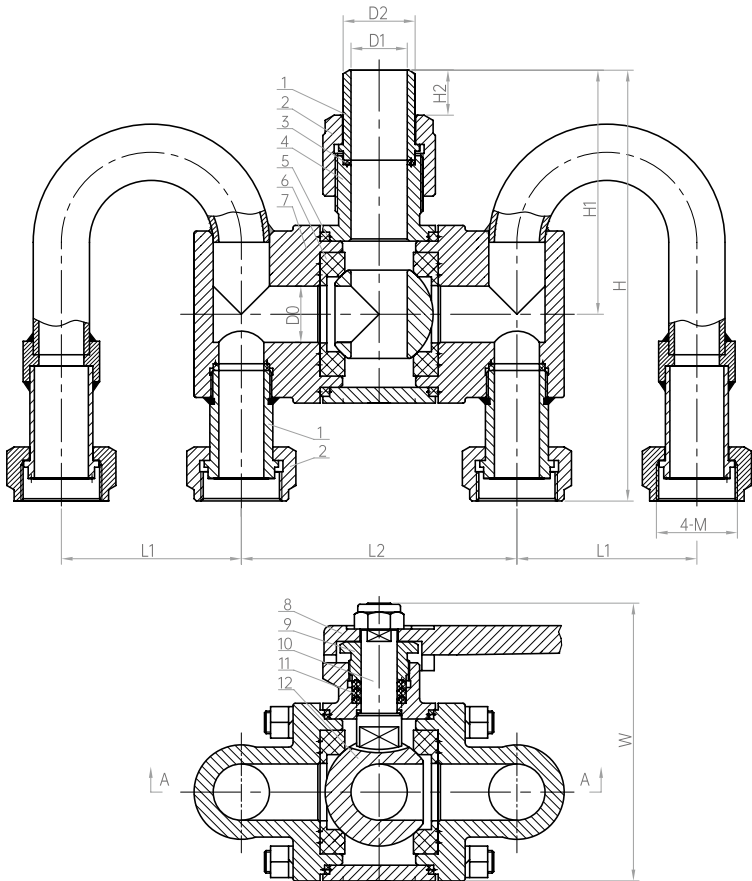

Materials

1 Pipe	S30408	5 Washer	PTFE	9 Gland Nut	HPb59-1
2 Nut	HPb59-1	6 Ball Lining	PTFE+C	10 Stem	S30408
3 Gasket	PTFE	7 Bonnet	CF8	11 Gasket	PTFE
4 Body	CF8	8 Hand Lever	CF8	12 Ball	S30408

Model No.	Specifications & Dimensions (mm)										Weight(kg)
	H	H1	H2	W	D0	D1	D2	L1	L2	M	
DQS-25C	191.5	108.5	20	123.5	Ø25	Ø25	Ø32	102	122.5	M36×2	6.4
DQS-25C1	191.5	108.5	20	123.5	Ø25	Ø25	Ø32	80	122.5	M36×2	6.3