

Cryogenic Diverter Valve

Parameters

PN: 4.0MPa

DN: Ø25



Design Temp.: -196°C ~+80°C

Media: LNG, LO₂, LN₂, LAr, CO₂



This kind of product has certified by CE, EAC, TS and CCS

Standards: GB/T 24925, EN1626:2008, TR CU 032/2013

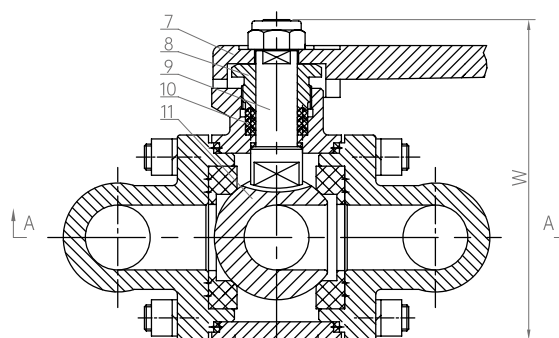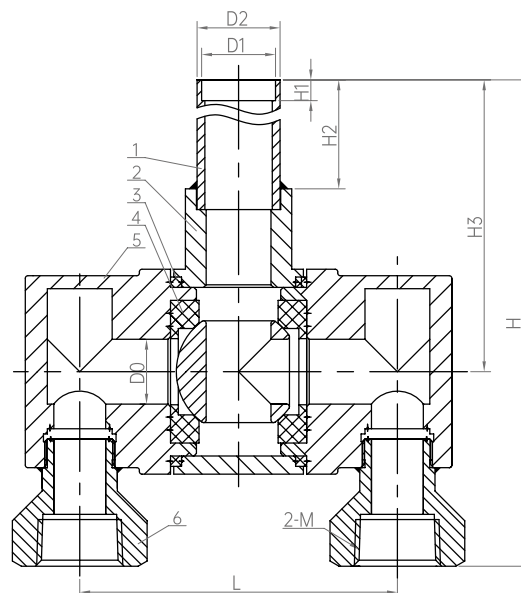

Materials

1 Pipe	S30408	5 Bonnet	CF8	9 Stem	S30408
2 Body	CF8	6 Adaptor	S30408	10 Gasket	PTFE
3 Washer	PTFE	7 Hand Lever	CF8	11 Ball	S30408
4 Ball Lining	PTFE+C	8 Gland Nut	HPb59-1		

Model No.	Specifications & Dimensions (mm)										Weight(kg)
	H	H1	H2	H3	W	D0	D1	D2	L	M	
DQS-25C8	235.5	--	92	162.5	123.5	Ø25	Ø26	Ø32	122.5	NPT 1	
DQS-25C9	235.5	--	92	162.5	123.5	Ø25	Ø26	Ø32	122.5	NPT 3/4	
DQS-25C10	235.5	8	92	162.5	123.5	Ø25	Ø28.5	Ø32	122.5	NPT 3/4	
DQS-25C11	235.5	--	92	162.5	123.5	Ø25	Ø26	Ø32	122.5	NPT 1/2	