


Cryogenic Diverter Valve

Parameters

PN: 4.0MPa
DN: Ø25
Design Temp.: -196℃ ~+80℃
Media: LNG, LO₂, LN₂, LAr, CO₂



This kind of product has certified by CE, EAC, TS and CCS
Standards: GB/T 24925, EN1626:2008, TR CU 032/2013

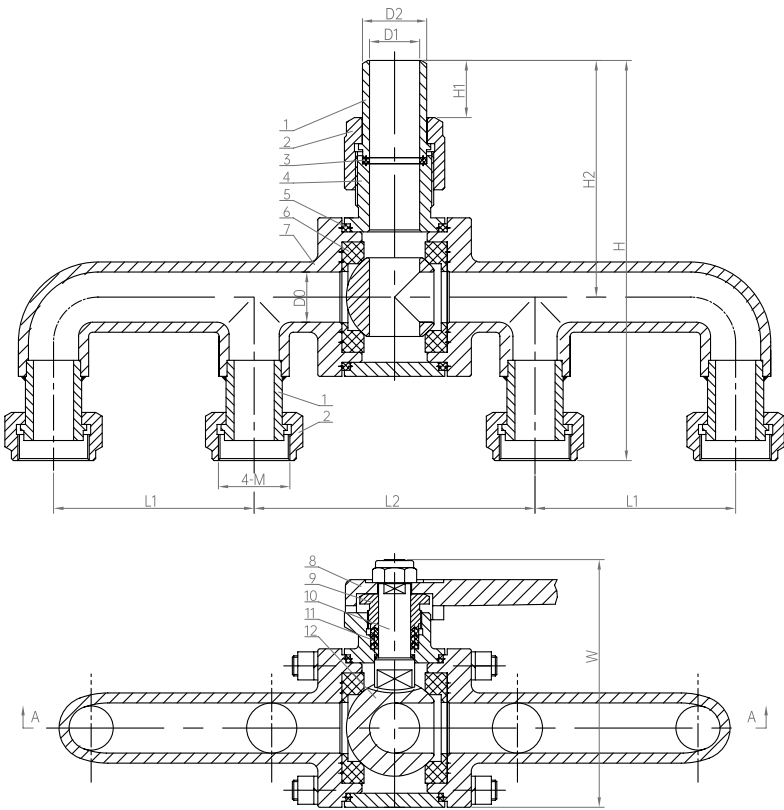

Materials

1	Pipe	S30408	5	Washer	PTFE	9	Gland Nut	HPb59-1
2	Nut	HPb59-1	6	Ball Lining	PTFE+C	10	Stem	S30408
3	Gasket	PTFE	7	Bonnet	CF8	11	Gasket	PTFE
4	Body	CF8	8	Hand Lever	CF8	12	Ball	S30408

Model No.	Specifications & Dimensions (mm)										Weight(kg)
	H	H1	H2	W	D0	D1	D2	L1	L2	M	
DQS-25S2	199.5	28.5	118	123.5	Ø25	Ø25	Ø32	100	140	M36×2	2.7