


Cryogenic Diverter Valve

Parameters

PN: 4.0MPa
DN: Ø25
Design Temp.: -196℃ ~+80℃
Media: LNG, LO₂, LN₂, LAr, CO₂



This kind of product has certified by CE, EAC, TS and CCS
Standards: GB/T 24925, EN1626:2008, TR CU 032/2013

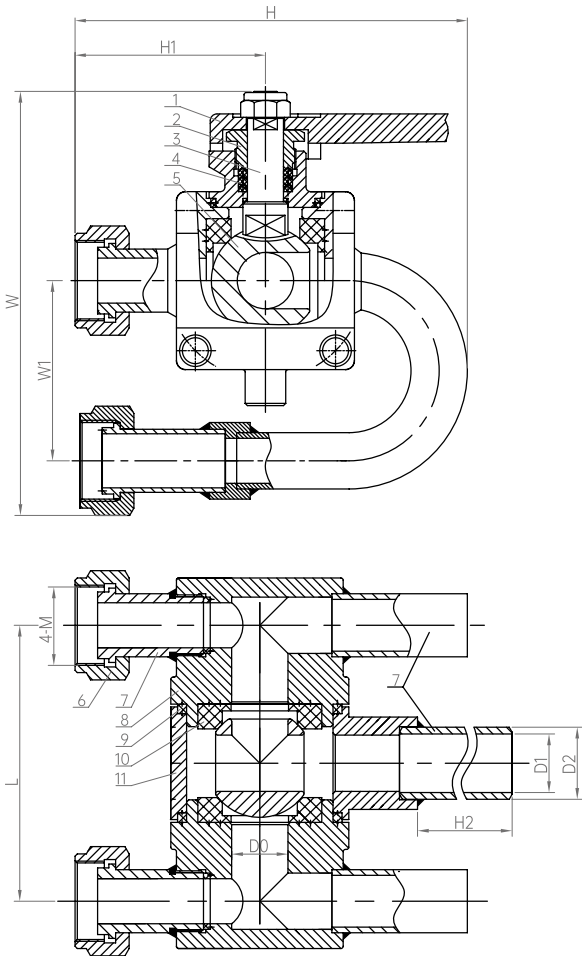

Materials

1	Hand Lever	CF8	5	Ball	S30408	9	Washer	PTFE
2	Gland Nut	HPb59-1	6	Nut	HPb59-1	10	Ball Lining	PTFE+C
3	Stem	S30408	7	Pipe	S30408	11	Body	CF8
4	Gasket	PTFE	8	Bonnet	CF8			

Model No.	Specifications & Dimensions (mm)										Weight (kg)
	H	H1	H2	W	W1	D0	D1	D2	L	M	
DQS-25W3	172	84.5	92	188	80	Ø25	Ø26	Ø32	122.5	M36×2	6.2