


Cryogenic Diverter Valve

Parameters

PN: 4.0MPa
DN: Ø40
Design Temp.: -196℃ ~+80℃
Media: LNG, LO₂, LN₂, LAr, CO₂



This kind of product has certified by CE, EAC, TS and CCS
Standards: GB/T 24925, EN1626:2008, TR CU 032/2013

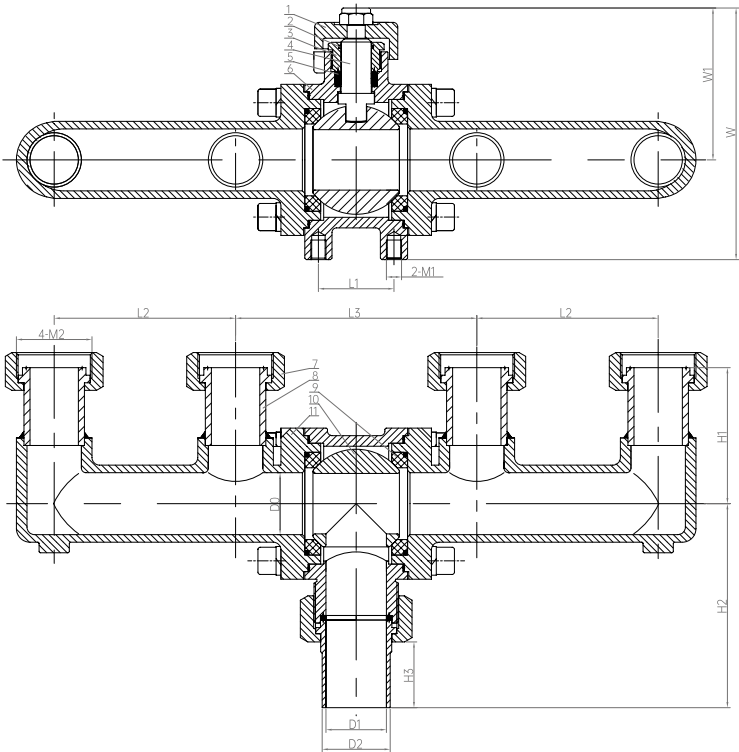

Materials

1	Hand Lever	CF8	5	Gasket	PTFE	9	Ball Lining	PTFE+C
2	O Ring	Fluororubber	6	Body	CF8	10	Ball	S30408
3	Gland Nut	HPb59-1	7	Nut	HPb59-1	11	Bonnet	CF8
4	Stem	S30408	8	Pipe	S30408			

Model No.	Specifications & Dimensions (mm)													Weight(kg)
	W	W1	L1	L2	L3	H1	H2	H3	D0	D1	D2	M1	M2	
DQS-40.001	166.5	101	50	120	160	90	135	43.5	Ø40	Ø40	Ø45	M10×1.5	M50×2	11