


Cryogenic Diverter Valve

Parameters

PN: 4.0MPa
DN: Ø15~Ø25
Design Temp.: -196°C ~+80°C
Media: LNG, LO₂, LN₂, LAr, CO₂



This kind of product has certified by CE, EAC, TS and CCS
Standards: GB/T 24925, EN1626:2008, TR CU 032

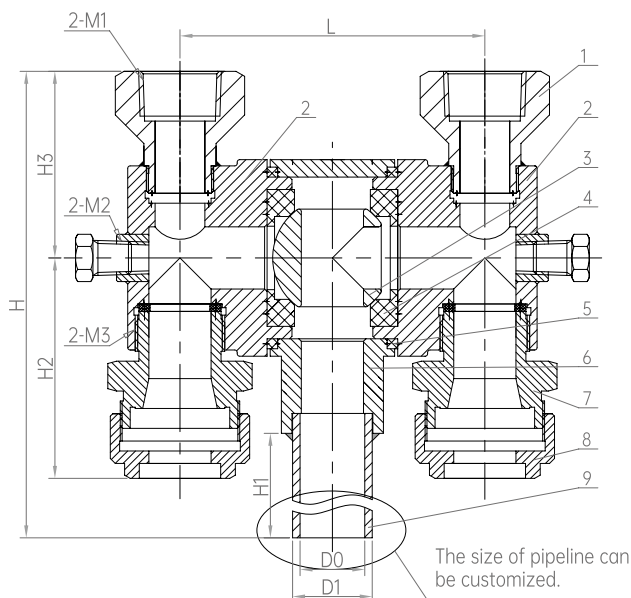

Materials

1	Adaptor	S30408	4	Ball Lining	PTFE+C	7	Adaptor	C36000
2	Bonnet	CF8	5	Gasket	PTFE	8	Nut	S30408
3	Ball	S30408	6	Body	CF8	9	Pipe	S30408

Remarks: The opening of hand wheel at any position will ensure the full flow of valve.

Model No.	Specifications & Dimensions (mm)											Weight(kg)
	H	H1	H2	H3	L	D0	D1	M1	M2	M3	Cv	
DQS-15.98	147.5	45	75	51.5	113	15	Ø18	NPT 1/2	NPT 1/4	NPT 1/2	7.1	
DQS-25.98	208	45	87	75	122.5	25	Ø32	NPT 1	NPT 1/4	M36×2	21	