



DA22F-40P

Cryogenic Safety Valve

Parameters

PN: 4.0MPa

Design Temp.: -196°C ~+80°C


Media: LNG, LO₂, LN₂, LAr, CO₂

Flow Coefficient: 0.66



This kind of product has certified by CE, EAC, TS and CCS

Standards: GB/T 29026, EN13648:2008, TR CU 032/2013

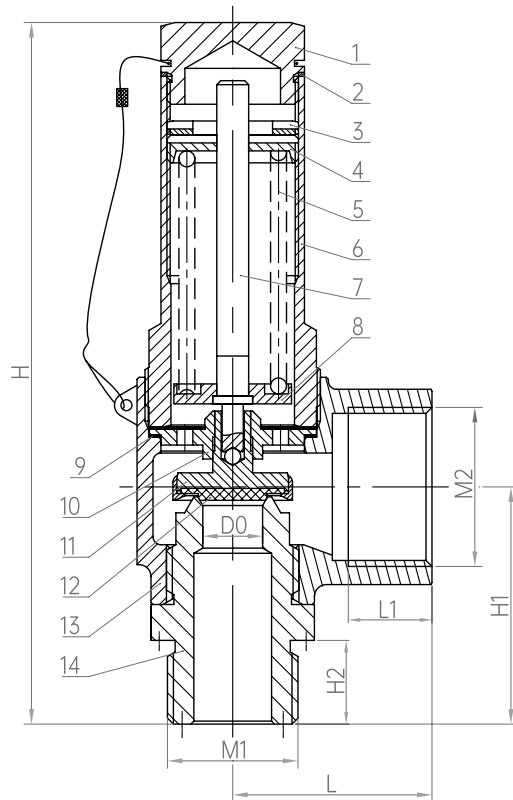

Materials

1	Dust Cover	HPb59-1	6	Bonnet	CF8	11	Disc	HPb59-1
2	Upper Gasket	T2	7	Stem	HPb59-1	12	Gasket	PTFE+C
3	Lock Nut	HPb59-1	8	Spring Bottom Pad	HPb59-1	13	Body	CF8
4	Adjusting Nut	HPb59-1	9	Sealing	T2	14	Valve Seat	HPb59-1
5	Spring	S30210	10	Gland Ring	HPb59-1			

Model No.	Specifications & Dimensions (mm)									Set Pressure (MPa)	Weight(kg)
	H	H1	H2	D0	L	L1	M1	M2	DN		
DA22F-40P(15M)	154.5	49.5	13	Ø10.5	42.5	12	G 1/2	G 1	Ø15	0.4 ~ 1.59	0.8
DA22F-40P(15M1)										1.60 ~ 2.7	0.8
DA22F-40P(15M2)										2.71 ~ 3.5	0.8
DA22F-40P(25M)	176.5	60	18	Ø15	47	20	G 1	G 1 1/4	Ø25	0.4 ~ 1.59	1.3
DA22F-40P(25M1)										1.60 ~ 2.7	1.3
DA22F-40P(25M2)										2.71 ~ 3.5	1.3