

DA42F-40P


Cryogenic Safety Valve

Parameters

PN: 4.0MPa
DN: Ø25
Design Temp.: -196°C ~+80°C
Media: LNG, LO₂, LN₂, LAr, CO₂
Flow Coefficient: 0.66
Set pressure: (0.4 ~ 1.59) MPa



This kind of product has certified by CE, EAC, TS and CCS
Standards: GB/T 29026, EN13648:2008, TR CU 032/2013

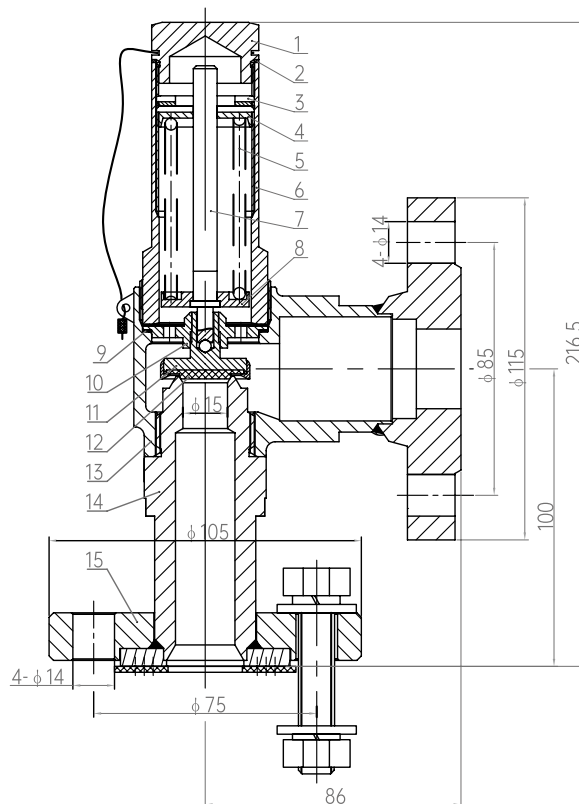

Model No.: DA22F-40P(25HC)

Materials

1	Dust Cover	HPb59-1	6	Bonnet	CF8	11	Disc	HPb59-1
2	Upper Gasket	T2	7	Stem	HPb59-1	12	Gasket	PCTFE
3	Lock Nut	HPb59-1	8	Spring Bottom Pad	HPb59-1	13	Body	CF8
4	Adjusting Nut	HPb59-1	9	Sealing	T2	14	Valve Seat	HPb59-1
5	Spring	S30210	10	Gland Ring	HPb59-1	15	Flange	S30408