

DA22F-40P

Cryogenic Safety Valve

Parameters

PN: 4.0MPa

DN: Ø25

Design Temp.: -196°C ~ +80°C


Media: LNG, LO₂, LN₂, LAr, CO₂

Flow Coefficient: 0.66

Set pressure: (0.4 ~ 1.59) MPa

Connection: Flange

Design Standard of Flange: HG/T 20592-2009

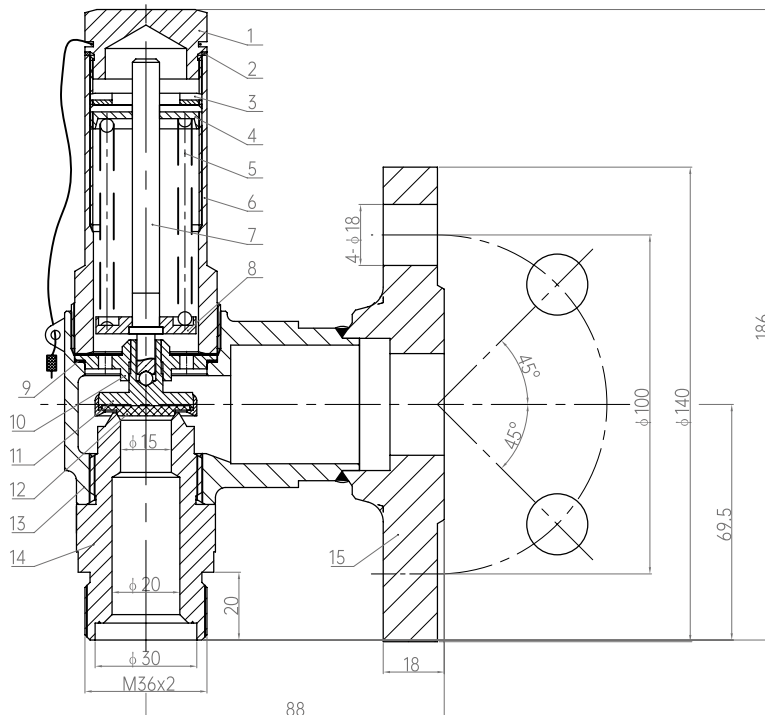

This kind of product has certified by CE, EAC, TS and CCS

Standards: GB/T 29026, EN13648:2008, TR CU 032/2013

Model No.: DA22F-40P(25HD)

Materials

1 Dust Cover	HPb59-1	6 Bonnet	CF8	11 Disc	HPb59-1
2 Upper Gasket	T2	7 Stem	HPb59-1	12 Gasket	PCTFE
3 Lock Nut	HPb59-1	8 Spring Bottom Pad	HPb59-1	13 Body	CF8
4 Adjusting Nut	HPb59-1	9 Sealing	T2	14 Valve Seat	HPb59-1
5 Spring	S30210	10 Gland Ring	HPb59-1	15 Flange	S30408