

DA42F-40P

Cryogenic Safety Valve

Parameters

PN: 4.0MPa

DN: Ø25

Design Temp.: -196℃ ~+80℃


Media: LNG, LO₂, LN₂, LAr, CO₂

Flow Coefficient: 0.66

Set pressure: (0.4 ~ 1.59) MPa

Connection: Flange

Design Standard of Flange: HG/T 20592-2009

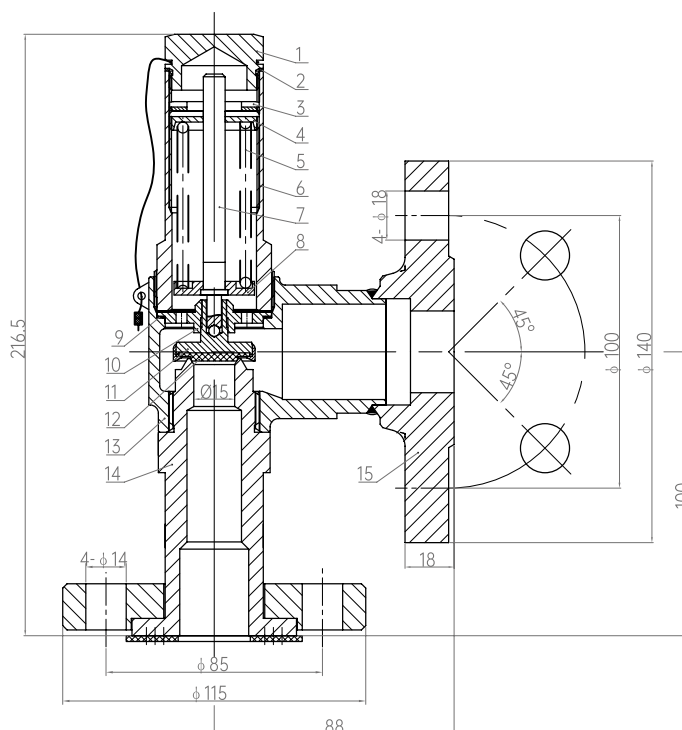

This kind of product has certified by CE, EAC, TS and CCS

Standards: GB/T 29026, EN13648:2008, TR CU 032/2013

Model No.: DA22F-40P(25HE)

Materials

1	Dust Cover	HPb59-1	6	Bonnet	CF8	11	Disc	HPb59-1
2	Upper Gasket	T2	7	Stem	HPb59-1	12	Gasket	PCTFE
3	Lock Nut	HPb59-1	8	Spring Bottom Pad	HPb59-1	13	Body	CF8
4	Adjusting Nut	HPb59-1	9	Sealing	T2	14	Valve Seat	HPb59-1
5	Spring	S30210	10	Gland Ring	HPb59-1	15	Flange	S30408