

DA22F-40P

Cryogenic Safety Valve

Parameters

PN: 4.0MPa

DN: Ø32


Design Temp.: -196°C ~+80°C

Media: LNG, LO₂, LN₂, LAr, CO₂

Flow Coefficient: 0.66



This kind of product has certified by CE, EAC, TS and CCS
Standards: GB/T 29026, EN13648:2008, TR CU 032/2013

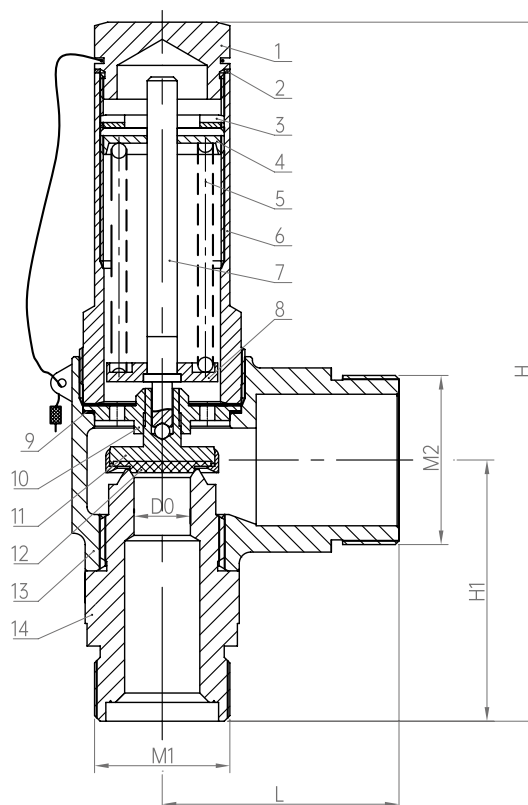

Materials

1 Dust Cover	HPb59-1	6 Bonnet	CF8	11 Disc	HPb59-1
2 Upper Gasket	T2	7 Stem	HPb59-1	12 Gasket	PCTFE
3 Lock Nut	HPb59-1	8 Spring Bottom Pad	HPb59-1	13 Body	CF8
4 Adjusting Nut	HPb59-1	9 Sealing	T2	14 Valve Seat	HPb59-1
5 Spring	S30210	10 Gland Ring	HPb59-1		

Model No.	Specifications & Dimensions (mm)						Set Pressure (MPa)	Weight(kg)
	H	H1	D0	L	M1	M2		
DA22F-40P(32C)	239	77	Ø25	76.5	M48×2	M56×2	0.4 ~ 1.59	
DA22F-40P(32C1)							1.60 ~ 2.7	
DA22F-40P(32C2)							2.71 ~ 3.5	