

DA22Y-40P

Cryogenic Safety Valve

Parameters

PN: 4.0MPa

DN: Ø40


Design Temp.: -196°C ~+80°C

Media: LNG, LO₂, LN₂, LAr, CO₂

Flow Coefficient: 0.66



This kind of product has certified by CE, EAC, TS and CCS
Standards: GB/T 29026, EN13648:2008, TR CU 032/2013

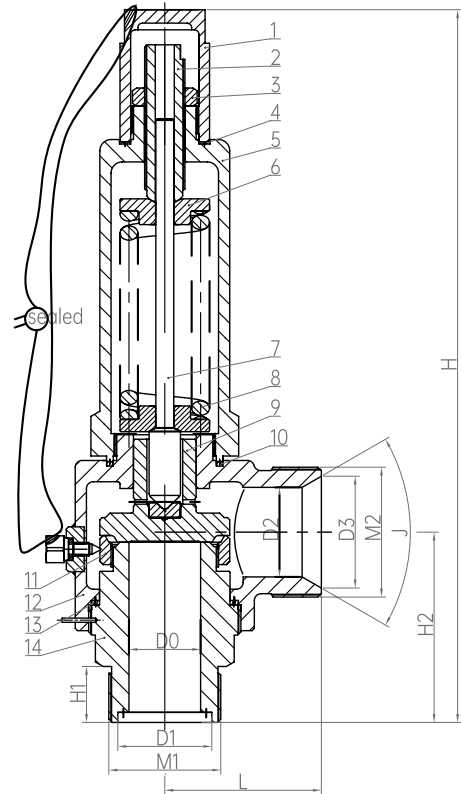

Materials

1 Cover	HPb59-1	6 Spring Seat	S30408	11 Adjusting Ring	HPb59-1
2 Adjusting Screw	HPb59-1	7 Ejector Bar	20Cr13	12 Body	S30408
3 Lock Nut	S30408	8 Spring	S30210	13 Sealing	T2
4 Sealing	PTFE	9 Disc	S32168	14 Valve Seat	S32168
5 Bonnet	S30408	10 Sealing	T2		

Model No.	Specifications & Dimensions (mm)											Set Pressure (MPa)	Weight(kg)
	H	H1	H2	D0	D1	D2	D3	L	J	M1	M2		
DA22Y-40P(40)	318	25	85	Ø32	Ø42	Ø40	Ø50	70	60°	M50x2	M58x2	1.5 ~ 3.5	
DA22Y-40P(40A)												0.4 ~ 1.49	