



DA22Y-40P

Cryogenic Safety Valve

Parameters

PN: 4.0MPa

DN: Ø50


Design Temp.: -196℃ ~+80℃

Media: LNG, LO₂, LN₂, LAr, CO₂

Flow Coefficient: 0.66



This kind of product has certified by CE, EAC, TS and CCS
Standards: GB/T 29026, EN13648:2008, TR CU 032/2013

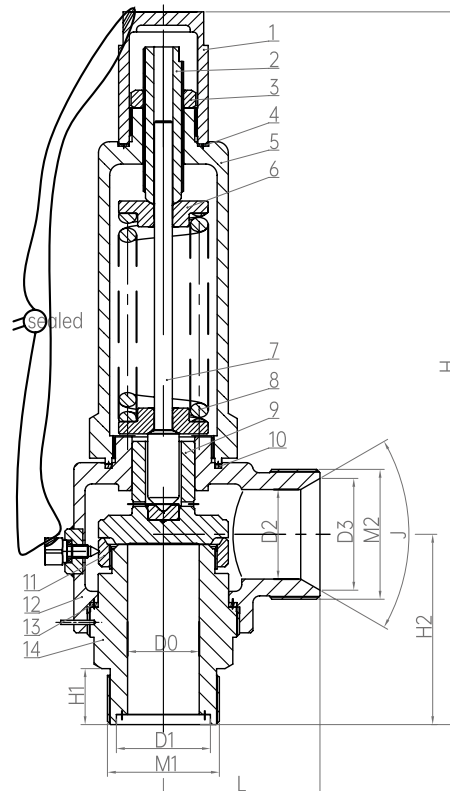

Materials

1	Cover	HPb59-1	6	Spring Seat	S30408	11	Adjusting Ring	HPb59-1
2	Adjusting Screw	HPb59-1	7	Ejector Bar	20Cr13	12	Body	S30408
3	Lock Nut	S30408	8	Spring	S30210	13	Sealing	T2
4	Sealing	PTFE	9	Disc	S32168	14	Valve Seat	S32168
5	Bonnet	S30408	10	Sealing	T2			

Model No.	Specifications & Dimensions (mm)										Set Pressure (MPa)	Weight(kg)	
	H	H1	H2	D0	D1	D2	D3	L	J	M1			M2
DA22Y-40P(50)	318	25	85	Ø32	Ø42	Ø40	Ø50	70	60°	M50x2	M58x2	1.5 ~ 3.5	
DA22Y-40P(50A)												0.4 ~ 1.49	