




Cryogenic Safety Valve

Parameters

PN: 4.0MPa
DN: Ø15 ~ Ø25
Design Temp.: -196℃ ~+80℃
Media: LNG. LO₂. LN₂. LAr. CO₂



This kind of product has certified by CE, EAC, TS and CCS
Standards: GB/T 29026, EN13648:2008, TR CU 032/2013

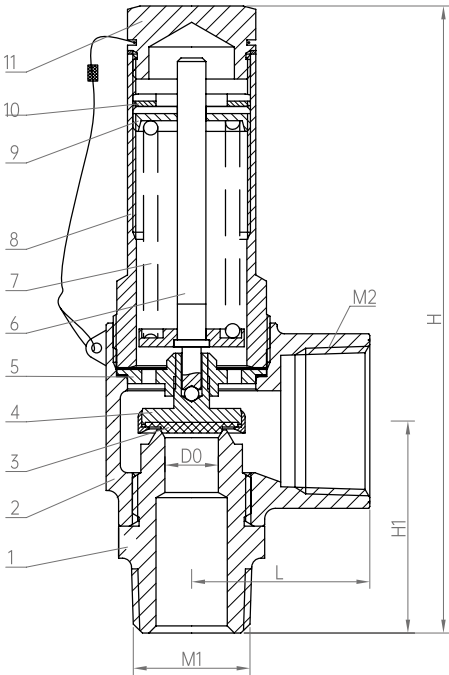

Materials

1	Valve Seat	C36000	5	Gland Ring	C36000	9	Adjusting Nut	C36000
2	Body	C37700	6	Stem	C36000	10	Lock Nut	C36000
3	Gasket	PTFE+C	7	Spring	S30210	11	Dust Cover	C36000
4	Connecting Bar of Disc	C36000	8	Bonnet	CF8			

Remarks: **DA22F40P(15B).97.xxx**

- Set pressure (bar)
- Materials of Body: C37700
- DN

Model No.	Specifications & Dimensions (mm)							Set pressure (Mpa)	Weight(kg)
	H	H1	D0(喉径)	L	M1	M2	S/G		
DA22F40P(15B).97.xxx	154.5	49.5	10.5	42.5	NPT 1/2	NPT 1	0.58	0.4 ~ 3.5	
DA22F40P(20B).97.xxx	155.5	50.5	10.5	42.5	NPT 3/4	NPT 1	0.58	0.4 ~ 3.5	
DA22F40P(25B).97.xxx	176	59.5	15	50	NPT 1	NPT 1-1/4	0.5	0.4 ~ 3.5	