



Cryogenic Safety Valve

Parameters

PN: 4.0MPa


Design Temp.: -196°C ~+80°C

Media: LNG, LO₂, LN₂, LAr, CO₂

Flow Coefficient: 0.66



This kind of product has certified by CE, EAC, TS and CCS
Standards: GB/T 29026, EN13648:2008, TR CU 032/2013

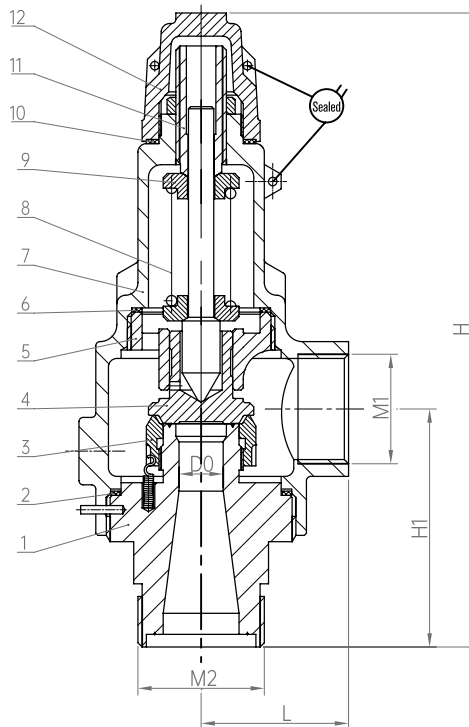

Materials

1	Valve Seat	S30408	5	Pilot Sleeve	CF8	9	Washer	S30408
2	Sealing	PTFE	6	Gasket	PTFE	10	Sealing	PTFE
3	Adjusting Ring	CF8	7	Body	CF8	11	Adjusting Screw	HPb59-1
4	Disc	S30408	8	Spring	S30210	12	Cover	CF8

Model No.	Specifications & Dimensions (mm)							Set Pressure (MPa)	Weight(kg)
	H	H1	M1	M2	L	D0	DN		
DAH-10	150	56	G3/4	M30x1.5	35	Ø10	Ø10	0.4 ~ 1.0	0.9
DAH-10A1								1.0 ~ 2.0	0.9
DAH-10A2								2.0 ~ 3.0	0.9
DAH-15	150	56	G3/4	M30x1.5	35	Ø15	Ø15	0.4 ~ 1.0	0.9
DAH-15A1								1.0 ~ 2.0	0.9
DAH-15A2								2.0 ~ 3.0	0.9
DAH-25	197	69	G1 1/4	M36x2	47	Ø25	Ø25	0.4 ~ 1.0	1.8
DAH-25A1								1.0 ~ 2.0	1.8