

DH14F-40T

Cryogenic Check Valve Swing Type


Parameters

PN: 4.0MPa

DN: Ø15 ~ Ø25

Design Temp.: -196°C ~ +80°C

Media: LNG, LO₂, LN₂, LAr, CO₂

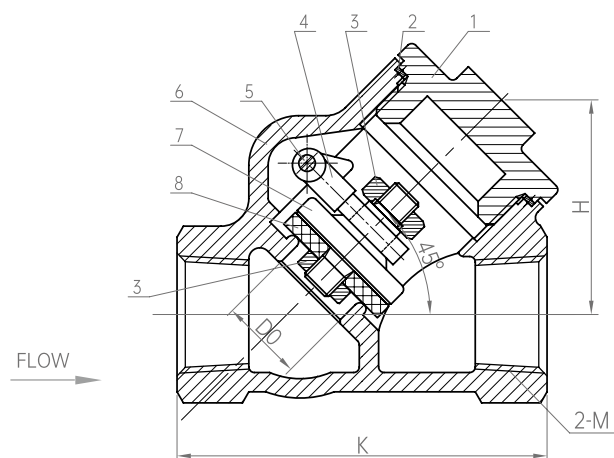

This kind of product has certified by CE, EAC, TS and CCS
Standards: GB/T 24925, EN1626:2008, TR CU 032/2013

Materials

1	Bonnet	C37700	5	Central Shaft	S30408
2	Gasket	T2	6	Body	B62
3	Nut	C36000	7	Disc	C36000
4	Rolling Bar	C37700	8	Gasket	PTFE

Model No.	Specifications & Dimensions (mm)					Weight(kg)
	K	D0	H	M	Cv	
DHX-15.99	67	15	39	NPT 1/2	4.5	0.6
DHX-25.99	95	25	54	NPT 1	10	