


DH61F-40P

Cryogenic Check Valve Uplift Type

Parameters

PN: 4.0MPa
DN: Ø10~Ø50
Design Temp.: -196°C ~+80°C
Media: LNG. LO₂. LN₂. LAr. CO₂

Connection : Butt Weld

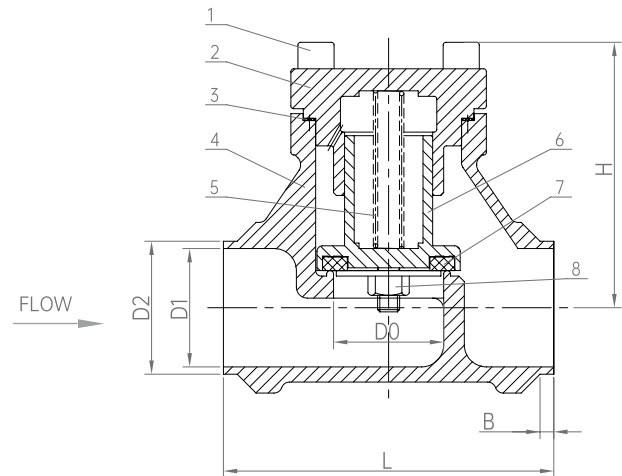

This kind of product has certified by CE, EAC, TS and CCS
Standards: GB/T 24925, EN1626:2008, TR CU 032/2013

Materials

1	Screw	S30408	5	Spring	S30210
2	Bonnet	CF8	6	Disc	C30408
3	Gasket	D#9000	7	Gasket	PTFE
4	Body	CF8	8	Nut	S30408

Remarks: **DH-15.98.xx**

02: metric system Butt Weld 04: British system Butt Weld
Materials of Body and Bonnet : CF8
DN

Model No.	Specifications & Dimensions (mm)									Weight(kg)
	H	L	D0	D1 metric system	D2 metric system	D1 British system	D2 British system	B	Cv	
DH-10.98.xx	55	60	13	/	/	13	17.2	4	2.0	
DH-15.98.xx	62	65	15	14	18	17.08	21.3	5	2.7	
DH-20.98.xx	70	80	20	20	25	22.48	26.9	5	5.5	
DH-25.98.xx	77	90	25	27	32	27.9	33.7	5	8.7	
DH-32.98.xx	89	105	32	32	38	36	42.4	5	15	
DH-40.98.xx	98	120	40	39	45	43	48.3	5	20	
DH-50.98.xx	111	140	50	51	57	55	60.3	5	35	