

Cryogenic Globe Valve Vacuum Jacketed

Parameters

PN: 4.0MPa

DN: Ø65


Design Temp.: -196°C ~+80°C

Media: LNG, LO₂, LN₂, LAr, CO₂

Connection : Butt Weld



This kind of product has certified by EAC and TS
Standards: GB/T 24925, TR CU 032/2013

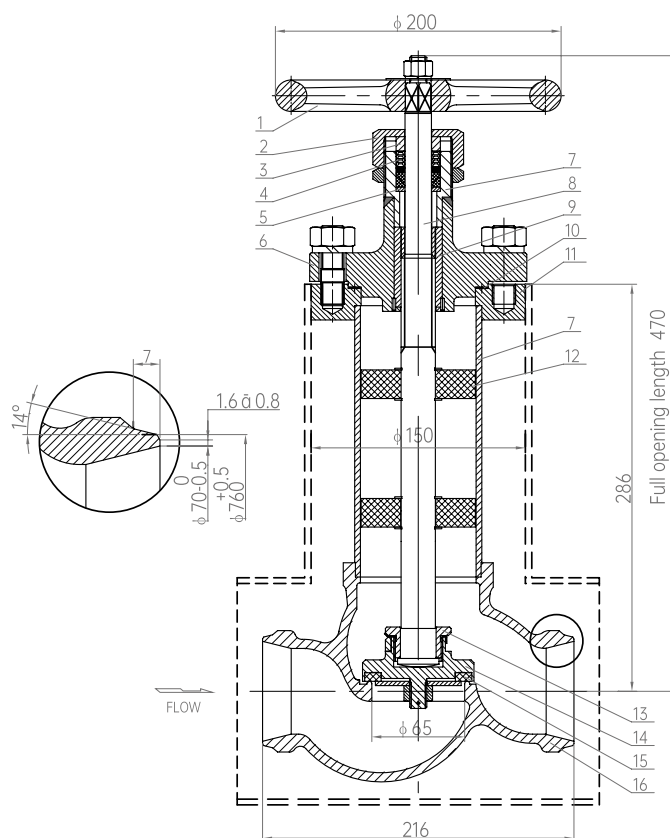

Model No.: DZJ-65A1

Materials

1 Hand Wheel	Y102	7 Connecting Pipe	S30408	13 Connecting Nut	S30408
2 Gland Nut	S30408	8 Stem	S30408	14 Disc	S30408
3 Gland	HPb59-1	9 Bushing	HPb59-1	15 Disc Sealing	PCTFE
4 Washer	PTFE	10 Washer	RPTFE	16 Body	CF8
5 Washer	HPb59-1	11 Flange	S30408		
6 Bonnet	CF8	12 Pilot Sleeve	PTFE		