

Cryogenic Check Valve

Angel Type Vacuum Jacketed


Parameters

PN: 4.0MPa
DN: Ø50
Design Temp.: -196℃ ~+80℃
Media: LNG, LO₂, LN₂, LAr, CO₂

Connection : Socket Weld



This kind of product has certified by EAC and TS
Standards: GB/T 24925, TR CU 032/2013

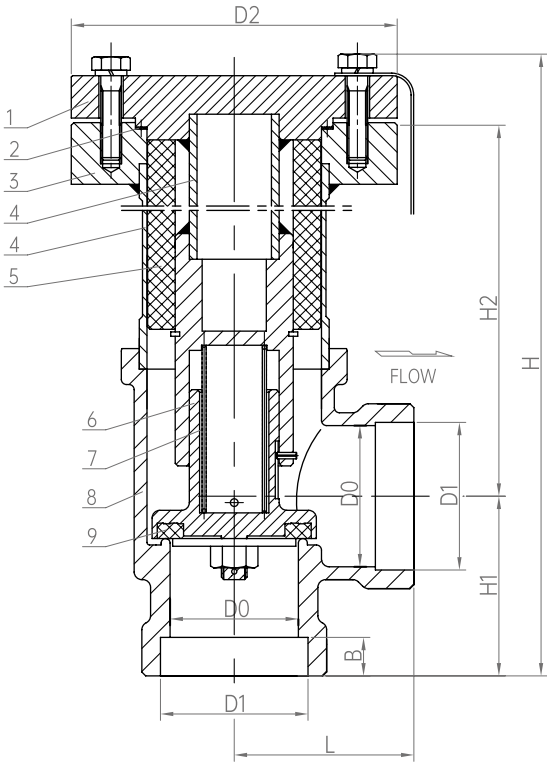

Materials

1 Bonnet	S30408	4 Connecting Pipe	S30408	7 Spring	S30210
2 Washer	RPTFE	5 Pilot Sleeve	PTFE	8 Body	CF8
3 Flange	S30408	6 Disc	S30408	9 Disc Sealing	PCTFE

Model No.	Specifications & Dimensions (mm)								Weight(kg)
	H	H1	H2	L	D0	D1	D2	B	
DZH-50J(001)	319.7	70	275.5	70	Ø50	Ø57.5	Ø126	15	