

Emergency Shut-off Valve Vacuum Jacketed

Parameters

PN: 4.0MPa

DN: Ø15~Ø50


Design Temp.: -196°C ~+80°C

Media: LNG, LO₂, LN₂, LAr, CO₂

Connection : Socket Weld



This kind of product has certified by EAC and TS
Standards: GB/T 24918, TR CU 032/2013

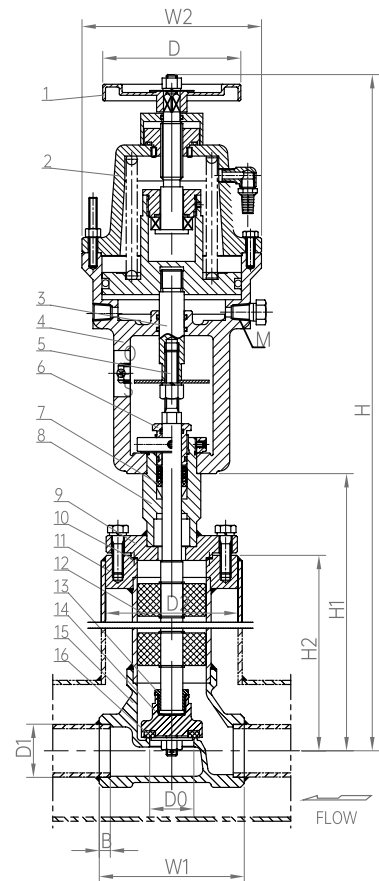

Materials

1	Hand Wheel	Y102	7	Washer	PTFE	13	Connecting Nut	S30408
2	Cylinder Cover	ZL104	8	Gland Packings	S30408	14	Disc	S30408
3	Connecting Shaft	S30408	9	Bonnet	S30408	15	Body	S30408
4	Cylinder	ZL104	10	Washer	RPTFE	16	Disc Sealing	PCTFE
5	Stem	S30408	11	Flange	S30408			
6	Gland Nut	S30408	12	Pilot Sleeve	PTFE			

Model No.	Specifications & Dimensions (mm)											Weight(kg)
	H	H1	H2	W	W1	W2	B	M	D0	D1	D2	
DZQ-15C	535	237	181	Ø100	65	Ø130	6	Rc1/4	Ø15	Ø18.5	Ø63	6.7
DZQ-25C	600.5	302.5	240	Ø100	90	Ø130	8	Rc1/4	Ø25	Ø32.5	Ø82	7.3
DZQ-32C	609.5	311.5	250	Ø100	105	Ø130	8	Rc1/4	Ø32	Ø38.5	Ø101	
DZQ-40C	691.5	343.5	286.5	Ø125	120	Ø160	8	Rc1/4	Ø40	Ø45.5	Ø101	
DZQ-50C	697.5	349.5	290	Ø125	140	Ø160	10	Rc1/4	Ø50	Ø57.5	Ø126	