




Emergency Shut-off Valve Vacuum Jacketed

Parameters

DN: Ø65
Design Temp.: -196℃ ~+80℃
Media: LNG, LO₂, LN₂, LAr, CO₂
Connection : Butt Weld



This kind of product has certified by EAC and TS
Standards: GB/T 24918, TR CU 032/2013

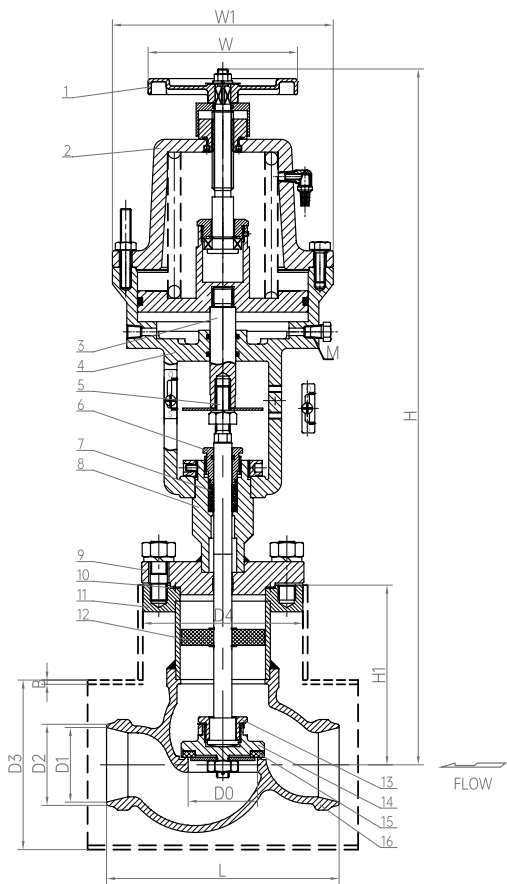

Materials

1	Hand Wheel	Y102	7	Washer	PTFE	13	Connecting Nut	S30408
2	Cylinder Cover	ZL104	8	Gland Packings	S30408	14	Disc	S30408
3	Connecting Shaft	S30408	9	Bonnet	S30408	15	Body	S30408
4	Cylinder	ZL104	10	Washer	RPTFE	16	Disc Sealing	PCTFE
5	Stem	S30408	11	Flange	S30408			
6	Gland Nut	S30408	12	Pilot Sleeve	PTFE			

Model No.	Specifications & Dimensions (mm)												PN (MPa)	Weight(kg)
	H	H1	L	W	W1	B	M	D0	D1	D2	D3	D4		
DZQ-65	654	168.5	218	Ø140	Ø207	4	Rc1/4	Ø65	Ø70	Ø76	Ø159	Ø150	1.6	
DZQ-65B1	654	168.5	218	Ø140	Ø207	4	Rc1/4	Ø65	Ø70	Ø76	Ø159	Ø150	2.5	
DZQ-65B2	654	168.5	218	Ø140	Ø207	4	Rc1/4	Ø65	Ø70	Ø76	Ø159	Ø150	4.0	