

Emergency Shut-off Valve Vacuum Jacketed

Parameters

PN: 1.6MPa

DN: Ø65


Design Temp.: -196°C ~+80°C

Media: LNG, LO₂, LN₂, LAr, CO₂

Connection : Butt Weld



This kind of product has certified by EAC and TS
Standards: GB/T 24918, TR CU 032/2013

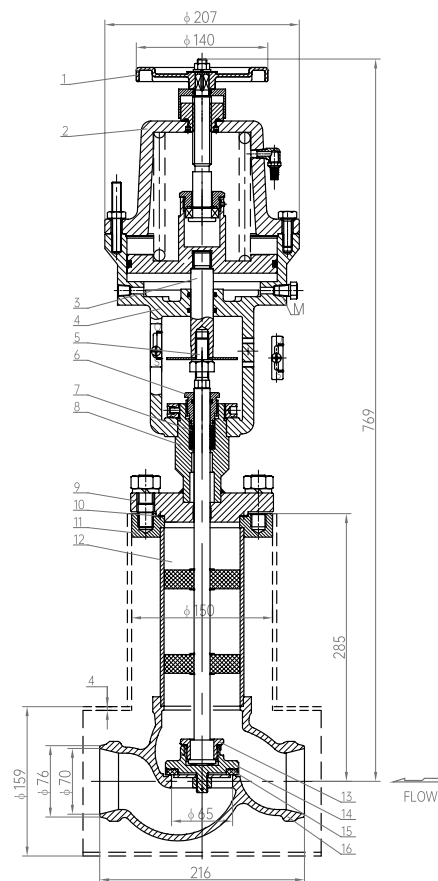

Model No.: DZQ-65C

Materials

1	Hand Wheel	Y102	7	Washer	PTFE	13	Connecting Nut	S30408
2	Cylinder Cover	ZL104	8	Gland Packings	S30408	14	Disc	S30408
3	Connecting Shaft	S30408	9	Bonnet	S30408	15	Body	S30408
4	Cylinder	ZL104	10	Washer	RPTFE	16	Disc Sealing	PCTFE
5	Stem	S30408	11	Flange	S30408			
6	Gland Nut	S30408	12	Pilot Sleeve	PTFE			