

DH61F-40P

Cryogenic Check Valve Uplift Type

Parameters


PN: 4.0MPa

DN: Ø10~Ø50

Design Temp.: -196°C ~+80°C

Media: LNG, LO₂, LN₂, LAr.

Connection : Butt Weld

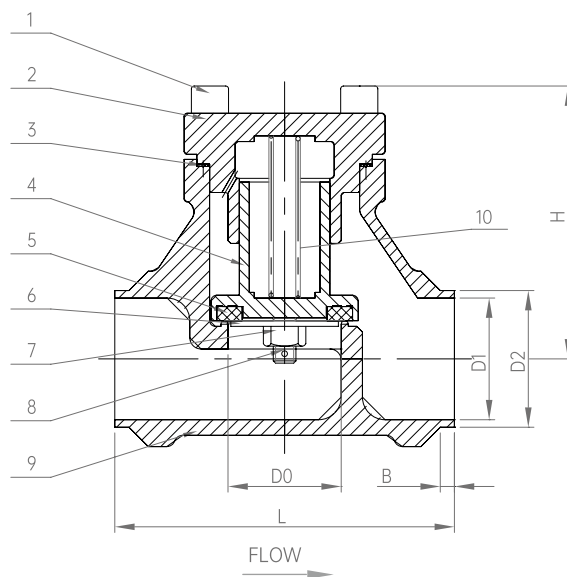

This kind of product has certified by CE, EAC, TS and CCS
Standards: GB/T 24925, EN1626:2008, TR CU 032/2013

Materials

1 Hexagon Screw	S30408	5 Disc Sealing	PTFE	8 Split pin	S30408
2 Bonnet	CF8	6 Gasket	S30408	9 Body	CF8
3 Gasket	RPTFE	7 Hexagon Nut	S30408	10 Spring	S30210
4 Disc	S30408				

Model No.	Specifications & Dimensions (mm)						Weight(kg)
	H	L	D0	D1	D2	B	
DH-10A	55	60	Ø13	Ø13	Ø17	4	
DH-15A	62	65	Ø15	Ø17.08	Ø21.3	5	0.7
DH-20A	70	80	Ø20	Ø22.48	Ø26.7	5	1.1
DH-25A	77	90	Ø25	Ø27.9	Ø33.4	5	1.4
DH-32A	89	105	Ø32	Ø36	Ø42.2	5	2.3
DH-40A	98	120	Ø40	Ø43	Ø48.3	5	2.9
DH-50A	111	140	Ø50	Ø55	Ø60.3	5	4.4
DH-15K	62	65	Ø15	Ø14	Ø18	5	0.7
DH-20K	70	80	Ø20	Ø20	Ø25	5	1.1
DH-25K	77	90	Ø25	Ø27	Ø32	5	1.4
DH-32K	89	105	Ø32	Ø32	Ø38	5	2.3
DH-40K	98	120	Ø40	Ø39	Ø45	5	2.9
DH-50K	111	140	Ø50	Ø51	Ø57	5	4.4