



Cryogenic Relief Valve

Parameters

PN: 4.0MPa

DN: Ø8

Design Temp.: -196°C ~+85°C


Media: LNG, LO₂, LN₂, LAr, CO₂

Flow Coefficient: 0.3



This kind of product has certified by CE,EAC,TS, ECE R110

Standards: GB/T 29026,EN13648:2008,TR CU 032/2013

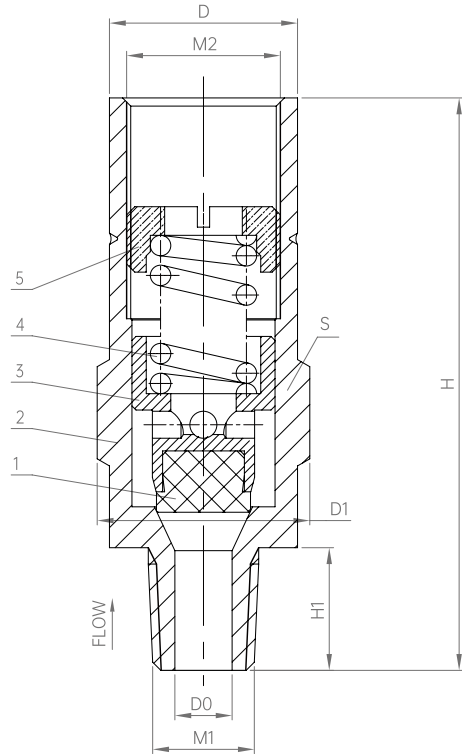

Materials

- | | |
|-----------------|---------|
| 1 Gasket | PFA |
| 2 Body | HPb59-1 |
| 3 Gate | HPb59-1 |
| 4 Spring | S30210 |
| 5 Adjusting Nut | HPb59-1 |

Model No.	Specifications & Dimensions (mm)						Set Pressure (Mpa)	Weight(kg)
	H	H1	D0	S	M1	M2		
DA-08F	70	15	Ø7	24	NPT 1/4	3/4-20UNEF	0.4 ~ 1.0	0.2
DA-08F1	70	15	Ø7	24	NPT 1/4	3/4-20UNEF	1.01 ~ 1.76	0.2
DA-08F2	70	15	Ø7	24	NPT 1/4	3/4-20UNEF	1.77 ~ 2.4	0.2
DA-08F3	70	15	Ø7	24	NPT 1/4	3/4-20UNEF	2.41 ~ 2.76	0.2
DA-08F5	70	15	Ø7	24	NPT 1/4	3/4-20UNEF	2.77 ~ 4.0	0.2