



# Cryogenic Diverter Valve

## Parameters

PN: 4.0MPa

DN: Ø15



Design Temp.: -196°C ~+80°C

Media: LNG, LO<sub>2</sub>, LN<sub>2</sub>, LAr, CO<sub>2</sub>



This kind of product has certified by CE, EAC, TS and CCS

Standards: GB/T 24925, EN1626:2008, TR CU 032/2013

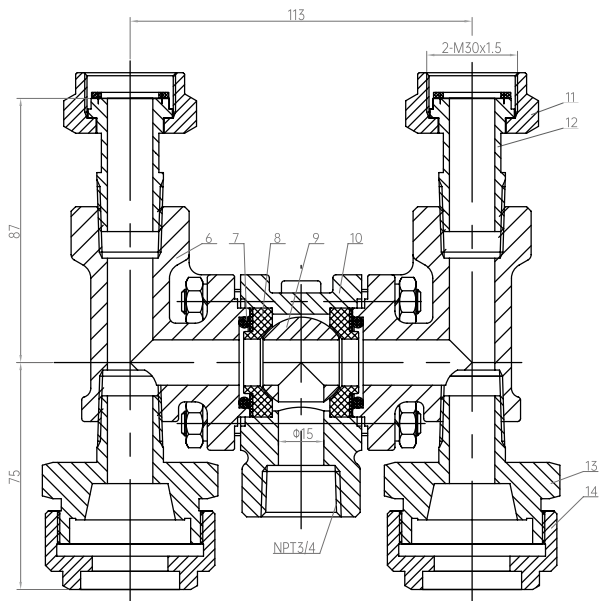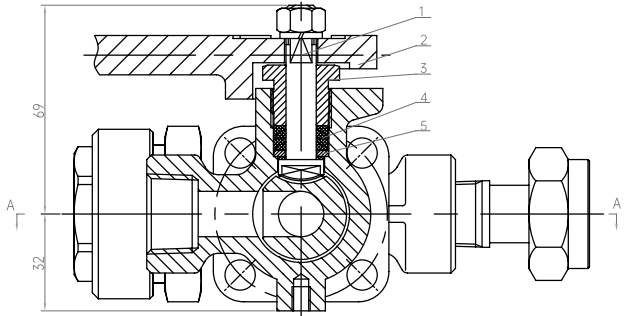

## Materials

Model No.DQS-15A

|   |             |         |    |             |        |    |             |         |
|---|-------------|---------|----|-------------|--------|----|-------------|---------|
| 1 | Stem        | S30408  | 6  | Bonnet      | CF8    | 11 | Hexagon Nut | HPb59-1 |
| 2 | Hand Leverl | CF8     | 7  | Gasket PTFE | PTFE   | 12 | Pipe        | S30408  |
| 3 | Gland Nut   | HPb59-1 | 8  | Ball Lining | PTFE   | 13 | Adaptor     | HPb59-1 |
| 4 | Gasket      | PTFE    | 9  | Ball        | S30408 | 14 | Nut         | S30408  |
| 5 | Washer      | S30408  | 10 | Body        | CF8    |    |             |         |