

Fueling Nozzle

Parameters

PN: 4.0MPa

DN: Ø25


Design Temp.: -196°C ~+85°C

Media: LNG, LO₂, LN₂, LAr, CO₂



This kind of product has certified by EAC

Standards: TR CU 032/2013

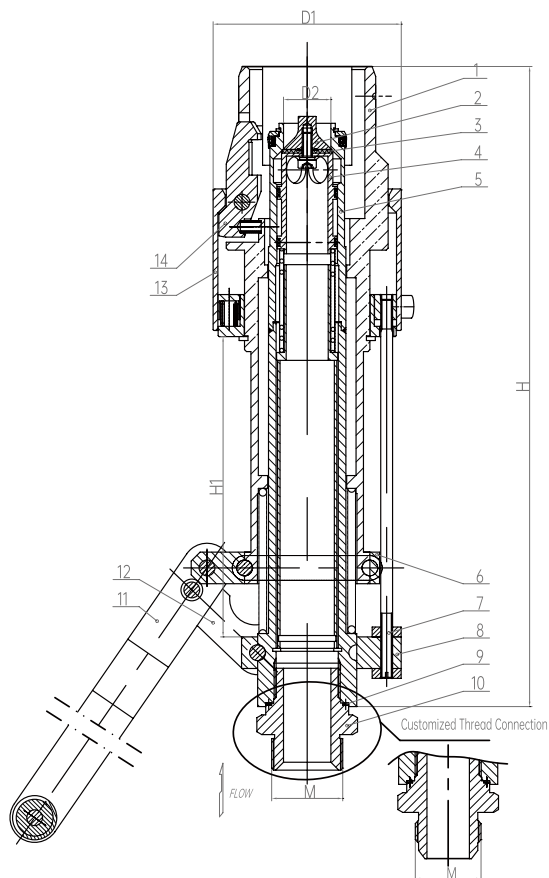

Materials

1 Outer	3A21	6 Fixed Block A	7075 (T6)	11 Handwheel Support	S30408
2 Top Cover	S30408	7 Pull Bar	S30408	12 Connecting Plate	S30408
3 Gasket	PCTFE	8 Fixes Block B	3A21	13 Casing Pipe C	S30408
4 Disc	3A21	9 Gasket	D#9000	14 Claw	S30408
5 Refueling Pipe	S30408	10 Thread Connector	S30408		

Model No.	Specifications & Dimensions (mm)					Weight(kg)
	D1	D2	M	H	H1	
DCJ-25	Ø95	Ø24	M36x2	332	152	7
DCJ-25A	Ø95	Ø24	1-5/16	332	152	7
DCJ-25B	Ø95	Ø24	M30x1.5	332	152	7