


Venting Nozzle

Parameters

PN: 4.0MPa
Design Temp.: -196°C ~+80°C
Media: LNG, LO₂, LN₂, LAr, CO₂



Venting nozzle is a charging component mainly used on vehicle mounted cylinder.
This kind of product has certified by EAC
Standards: TR CU 032/2013

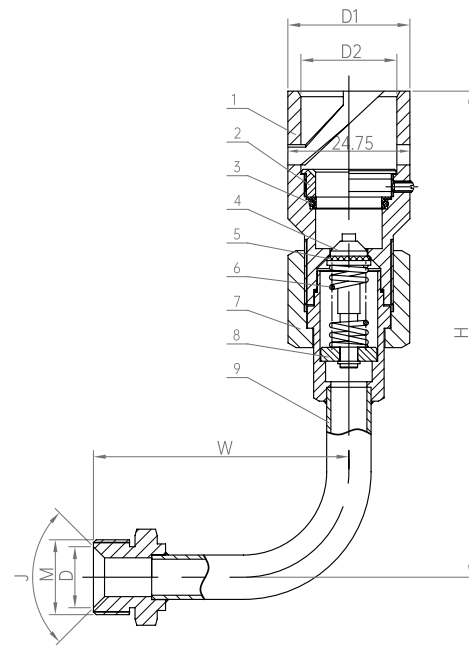

Materials

1	Union Connecting Pipe	S30408	4	Disc	S30408	7	Connecting Nut	HPb59-1
2	Gland Nut	S30210	5	Gasket	S30408	8	Spring Seat	S30408
3	O Ring	NBR	6	Spring	S30210	9	Connecting Pipe Assembly	S30408

Model No.	Specifications & Dimensions (mm)							Weight(kg)
	H	A	L	B	M	D0	D1	
DHJ-10	Ø44	Ø34.8	M22×1.5	92	175	Ø18	90°	1.0
DHJ-10B	Ø44	Ø34.8	M27×2	92	175	Ø22	90°	1.0
DHJ-10C	Ø44	Ø34.8	M22×1.5	92	335	Ø18	90°	1.0
DHJ-10D	Ø44	Ø34.8	M27×2	92	335	Ø22	90°	1.0