



High Pressure Cryogenic Globe Valve

Parameters


PN: 32MPa

DN: Ø15~Ø20

Design Temp.: -196°C ~+80°C

Media: LNG, LO₂, LN₂, LAr, CO₂

Connection : Socket Weld

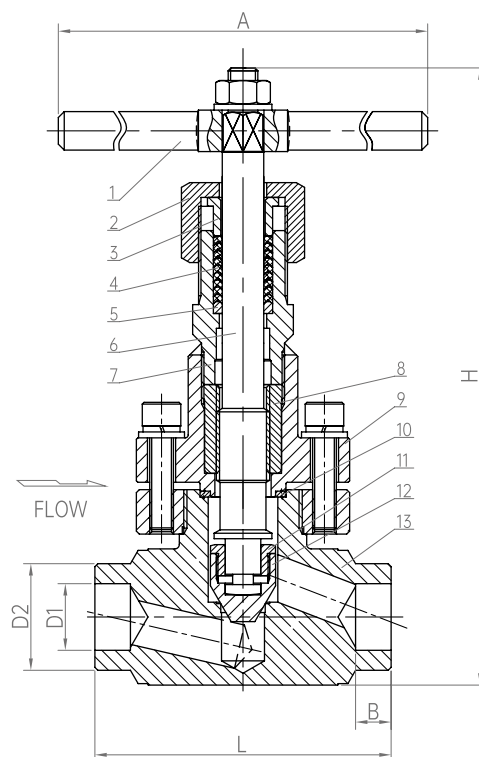

Materials

1	Hand Lever	S30408	6	Stem	S30408	11	Connecting Nut	S30408
2	Gland Nut	S30408	7	Connecting Pipe	S30408	12	Disc	S30408
3	Gland	S30408	8	Bushing	HPb59-1	13	Body	S30408
4	Gasket	PTFE	9	Bonnet	S30408			
5	Washer	HPb59-1	10	Gasket	T2			

Model No.	Specifications & Dimensions (mm)							Weight(kg)
	H	A	L	B	D0	D1	D2	
DGJ-15G	206.5	170	100	12	Ø15	Ø22.5	Ø36	
DGJ-20G	286	219	128	12.5	Ø20	Ø27.5	Ø46	
DGJ-20BG	206.5	170	100	12	Ø20	Ø26	Ø36	
DGJ-25G	286	219	128	12.5	Ø25	Ø32.5	Ø46	