

Cryogenic Globe Valve

Vacuum Jacketed


Parameters

PN: 4.0MPa
 DN: Ø15~Ø50
 Design Temp.: -196℃ ~+80℃
 Media: LNG, LO₂, LN₂, LAr, CO₂

Connection : Socket Weld



This kind of product has certified by EAC and TS
 Standards: GB/T 24925, TR CU 032/2013

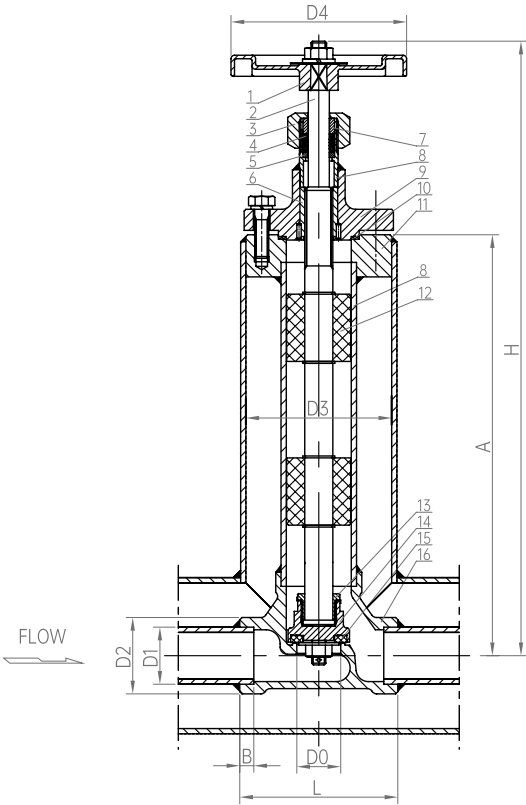

Materials

1	Hand Wheel	Y102	7	Gland	HPb59-1	13	Connecting Nut	S30408
2	Stem	S30408	8	Connecting Pipe	S30408	14	Disc	S30408
3	Gland Nut	S30408	9	Bonnet	CF8	15	Disc Sealing	PCTFE
4	Washer	PTFE	10	Washer	RPTFE	16	Body	CF8
5	Washer	HPb59-1	11	Flange	S30408			
6	Bushing	HPb59-1	12	Pilot Sleeve	PTFE			

Model No.	Specifications & Dimensions (mm)										Weight(kg)
	H Opening	H Closing	A	B	L	D0	D1	D2	D3	D4	
DZJ-15	359	345	250	6	65	Ø15	Ø18.5	Ø29.5	Ø63	Ø80	2.2
DZJ-25	364	349	240	8	90	Ø25	Ø32.5	Ø43.5	Ø82	Ø100	
DZJ-32	370	357	250	8	105	Ø32	Ø38.5	Ø53	Ø101	Ø100	
DZJ-40	434	416	286.5	8	120	Ø40	Ø45.5	Ø62	Ø101	Ø125	
DZJ-50	436	421	290	10	140	Ø50	Ø57.5	Ø72	Ø126	Ø140	