




High Pressure Cryogenic Safety Valve

Parameters

PN: 32MPa
DN: Ø10
Design Temp.: -196℃ ~+80℃
Media: LNG, LO₂, LN₂, LAr, CO₂
Flow Coefficient: 0.66



This kind of product has certified by EAC, TS
Standards: GB/T 29026, TR CU 032/2013

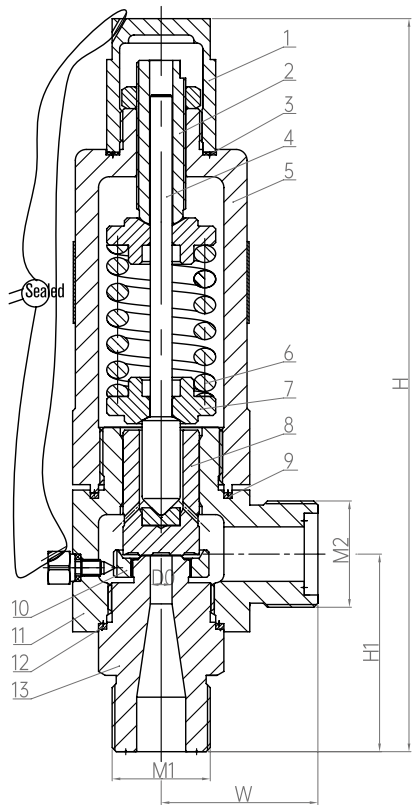

Materials

1	Cover	HPb59-1	6	Spring	S30210	11	Body	S30408
2	Adjusting Screw	HPb59-1	7	Spring Seat	S30408	12	Sealing	T2
3	Gasket	PTFE	8	Disc	S32168	13	Valve Seat	S32168
4	Ejector Bar	S42020	9	Sealing	T2			
5	Bonnet	S30408	10	Adjusting Ring	HPb59-1			

Model No.	Specifications & Dimensions (mm)						Pressure Adjusting Range (MPa)	Weight(kg)
	H	H1	D0	W	M1	M2		
DGA-10.A01	269	72.5	Ø8	57.5	M36×2	M39×2	11 ~ 19.9	
DGA-10.A02							20 ~ 28	
DGA-10.A03							5 ~ 10.9	