

Cryogenic Globe Valve

Parameters

PN: 4.0MPa


DN: Ø10

Design Temp.: -196°C ~+85°C

Media: LNG, LO₂, LN₂, LAr, CO₂



This kind of product has certified by CE, EAC, TS and CCS
Standards: GB/T 24925, EN1626:2008, TR CU 032/2013

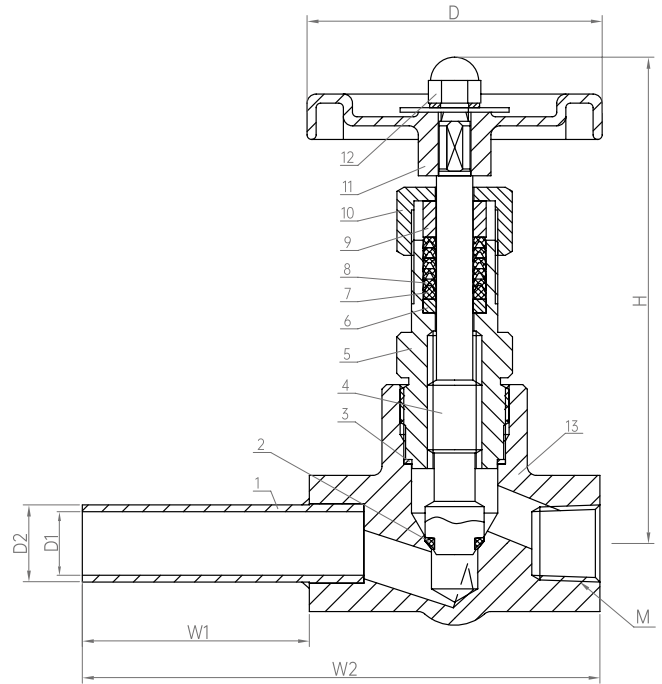

Materials

1 Pipe	S30408	6 Washer	C36000	11 Hand Wheel	Y102
2 Gasket	PCTFE	7 Upper Gasket	PTFE	12 Cap Nut	S30408
3 Washer	T2	8 V Ring	PTFE	13 Body	C37700
4 Stem	C36000	9 Gland	C36000		
5 Gland Nut	C36000	10 Gland Nut	C36000		

Remarks: **DJ-10P.21.xx**

- Connectin size of pipe and thread
- Connection type of inlet and outlet
- DN

Model No.	Specifications & Dimensions (mm)								Weight(kg)
	D	H	W1	W2	M	D1	D2	Cv	
DJ-10P.21.01	Ø70	106	27	91	NPT3/8	Ø13	Ø17	1.10	
DJ-10P.21.02	Ø70	106	50	114	NPT3/8	Ø13	Ø17	1.10	
DJ-10P.21.03	Ø70	106	87	137	NPT3/8	Ø13	Ø17	1.10	