


Cryogenic Regulator

Parameters

PN: 4.0MPa
DN: Ø15
Design Temp.: -196℃ ~+85℃
Media: LNG, LO₂, LN₂, LAr, CO₂



This kind of product has certified by CE, EAC, TS and CCS
Standards: GB/T 24925, EN1626:2008, TR CU 032/2013

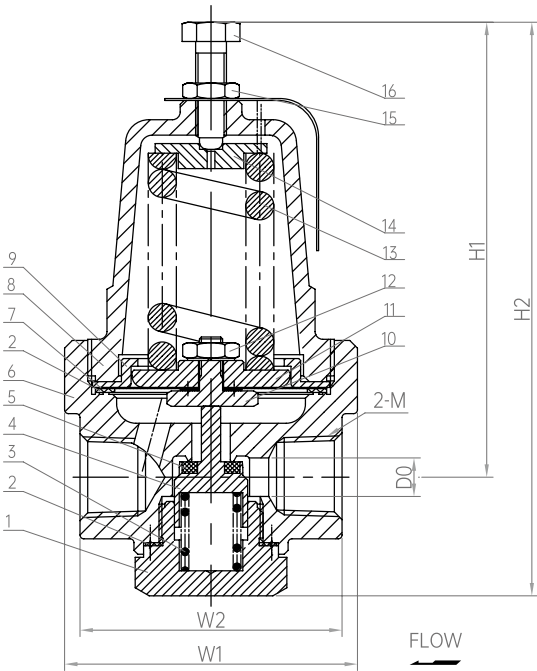

Materials

1	Lower Cover	C36000	7	Diaphragm	QSn6.5-0.1	13	Spring	S30210
2	Gasket	D#9000	8	Bonnet	C37700	14	Block	C36000
3	Lower Cover	S30210	9	Gland Ring	H62	15	Nut	S30408
4	Disc	C36000	10	Top Cover	C36000	16	Adjusting Screw	S30408
5	Gasket	PTFE+MoS2	11	Plate	C36000			
6	Body	C37700	12	Nut	S30408			

Model No.	Specifications & Dimensions (mm)							Pressure Adjusting Range (Mpa)	Weight(kg)
	H1	H2	W1	W2	M	D0	Cv		
TS-15	113	144	Ø76	68	NPT1/2	Ø10	3.2	P2=0.2~1.6	1.7
TS-15A	113	144	Ø76	68	NPT1/2	Ø10	3.2	P2=1.6~3.0	1.7
TS-15A1	113	144	Ø76	68	NPT1/2	Ø10	3.2	P2=3.0~3.5	1.7