

DJ41F-40P

Cryogenic Globe Valve Long Stem


Parameters

PN: 4.0MPa
DN: Ø15~Ø50
Design Temp.: -196°C ~+80°C
Media: LNG, LO₂, LN₂, LAr, CO₂

Connection :
Flanged Connection
with PN 40 and Class 150



This kind of product has certified by CE, EAC, TS and CCS
Standards: GB/T 24925, EN1626:2008, TR CU 032/2013

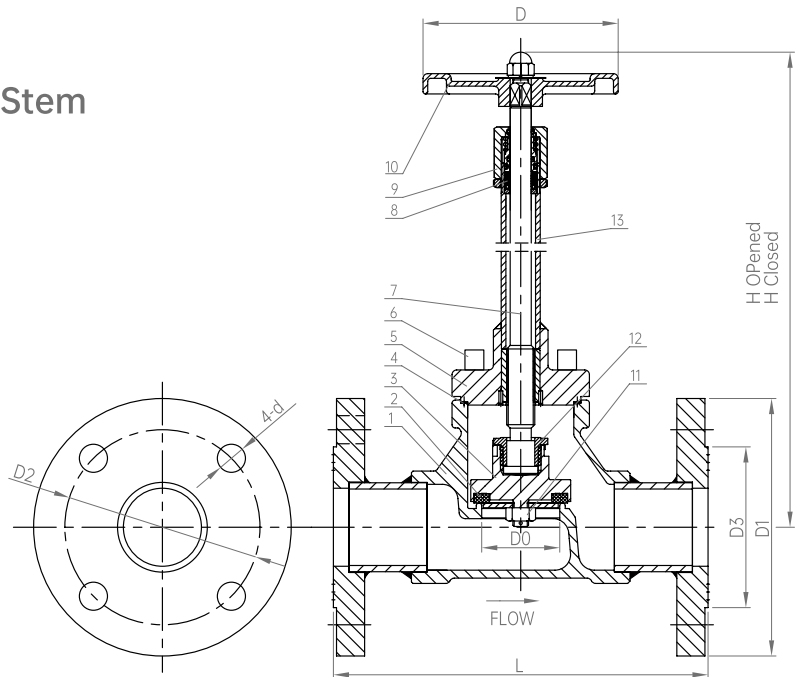

Materials

1	Body	CF8	6	Hexagon Screw	S30408	10	Hand Wheel	Y102
2	Disc Sealing	PCTFE	7	Stem	S30408	11	Hexagon Nut	S30408
3	Disc	S30408	8	V ring	PTFE	12	Connecting Nut	S30408
4	Gasket	RPTFE	9	Gland Nut	S30408	13	Connecting Pipe	S30408
5	Bonnet	S30408						

Model No.	Specifications & Dimensions (mm)									Weight(kg)
	H Opened	H Closed	L	D	D0	D1	D2	D3	d	
DJ-15F	257	248	129	Ø80	Ø15	Ø95	Ø65	Ø45	Ø14	
DJ-20F	263	254	154	Ø80	Ø20	Ø105	Ø75	Ø58	Ø14	
DJ-25F	295	282	166	Ø100	Ø25	Ø115	Ø85	Ø68	Ø14	
DJ-32F	305.5	291	185	Ø100	Ø32	Ø140	Ø100	Ø78	Ø18	
DJ-40F	373.5	356	214	Ø125	Ø40	Ø150	Ø110	Ø88	Ø18	
DJ-50F	384.5	361.5	240	Ø140	Ø50	Ø165	Ø125	Ø102	Ø18	
DJ-15FY	257	248	129	Ø80	Ø15	Ø90	Ø60.3	Ø34.9	Ø16	
DJ-20FY	263	254	154	Ø80	Ø20	Ø100	Ø69.9	Ø42.9	Ø16	
DJ-25FY	295	282	166	Ø100	Ø25	Ø110	Ø79.4	Ø50.8	Ø16	
DJ-32FY	305.5	291	185	Ø100	Ø32	Ø115	Ø88.9	Ø63.5	Ø16	
DJ-40FY	373.5	356	214	Ø125	Ø40	Ø125	Ø98.4	Ø73	Ø16	
DJ-50FY	384.5	361.5	240	Ø140	Ø50	Ø150	Ø127.7	Ø92.1	Ø18	